



PIN	A	B
10	20.32	10.16
16	27.94	17.78
20	33.02	22.86
24	38.10	27.94
26	40.64	30.48
34	50.80	40.64
40	58.42	48.26

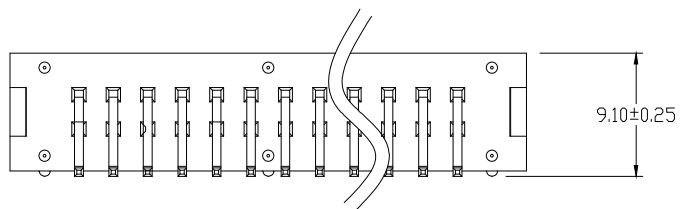

MATERIAL

HOUSING : NYLON 6T,UL94V-0
 CONTACT : PHOSPHOR BRONZE
 PLATED : GOLD-FLASH
 COLOR : NATURAL(BLACK)

SPECIFICATION

CURRENT : 1A
 OPERATING TEMPERAURE : -40°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE: 5000 MEGAOHMS MIN
 WITHSTAND VOLTAGE : 500 V AC MIN

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ±
 ANG ±

PJECTION

照片框

ORDER INFORMATION

B-W-xx-LF
 SERIES | LEADFREE
 10~40WAY
 90°SMT

DESCRIPTION:

www.morethanall.com