


3. 點位設定:

	A	B
001:	A01	B01
002:	A02	B02
003:	A03	B03
004:	A04	B04
005:	A05	B05
006:	A06	B06
007:	A07	B07
008:	A08	B08
009:	A09	B09
010:	A10	B10
.	.	.
020:	A20	B20

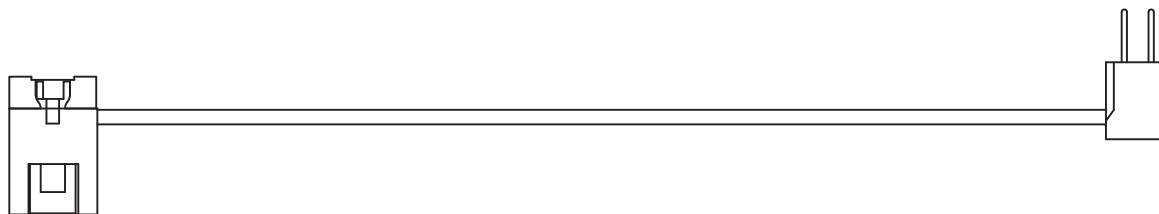

2. 電氣性質:

- 2.1 耐高壓: 電壓 : 200 V DC 測量時間 : 0.01 秒 測量規格: 20M Ω
- 2.2 短斷路判定值 : 20 K Ω
- 2.3 導通阻抗 : 1 Ω

備註:

1. 材質:

序號	品名	用量	單位
C	UL2651 28AWG 20C PH:1.27 GRAY CABLE L:335mm	335	mm
A	BOX HEADER PH:2.54 20P<GREY>兩件式	1	PCS
B	DIP PLUG 20P PH:2.54mm 兩件式	1	PCS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

B2F2-2020BS-E32C-LF

SERIES | | | LEADFREE
| | | 320mm
| | | MALE TO FEMALE
| | | BOTH SIDE
| | | 20 TO 20 WAY

DESCRIPTION: B/H PH:2.54 20P+DIP PLUG 20P UL2651 CABLE L:320mm