

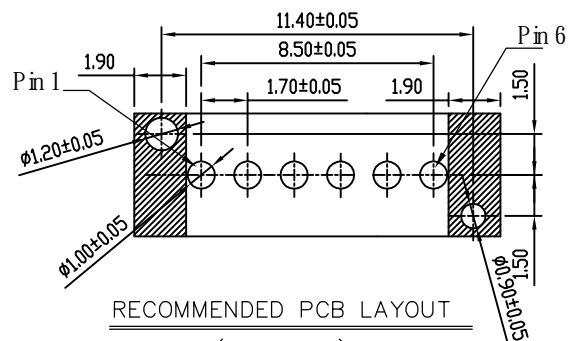
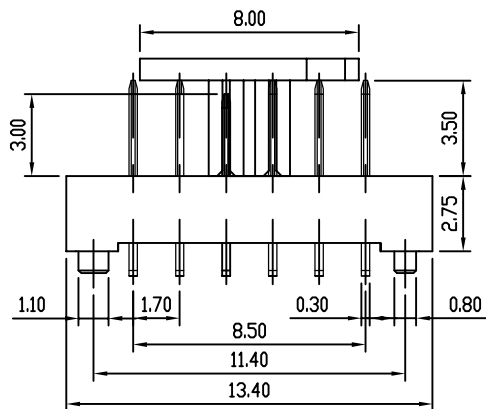


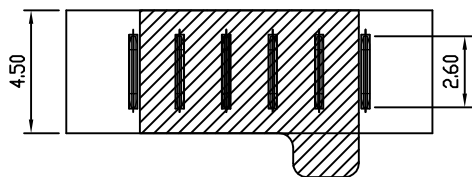

RECOMMENDED PCB LAYOUT
(TOP VIEW)

P.C.B. LAYOUT TOLERANCE: ± 0.05

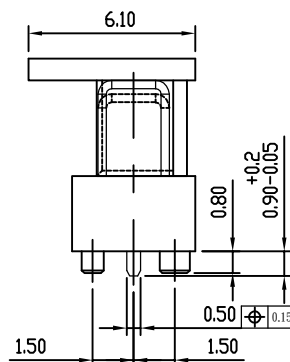

NOTES:

1. MATERIAL:


- HOUSING : EQUIVALENT HIGH OR OTHER HIGH PERFORMANCE RESINS, UL94V-0 RATED.
- TERMINAL : BRASS, JIS C2680 R-H, OR OTHER EQUIVALENT COPPER ALLOYS, $t=0.30\pm 0.02$

2. FINISH : GOLD PLATING IN THE CONTACT AREA, AND

SELECTIVE PLATING IN THE SOLDER TAIL AREA, NICKEL UNDERPLATING OVERALL.

3. THICKNESS= 1.0 ± 0.05 mm.

COLOR OF HOUSING: BLACK

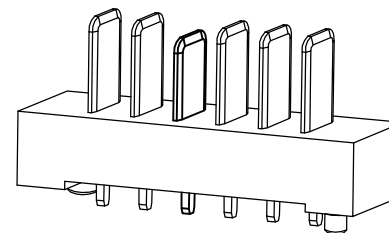

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG $\pm$

照片框

ORDER INFORMATION

BCC17-PD27PC-06-LF

SERIES

MALE

DIP 180°

POST

HIGH 2.75mm

LEADFREE

06 WAY

CAP

POST

DESCRIPTION: BATTERY CONN.MALE DIP PITCH=1.70mm