
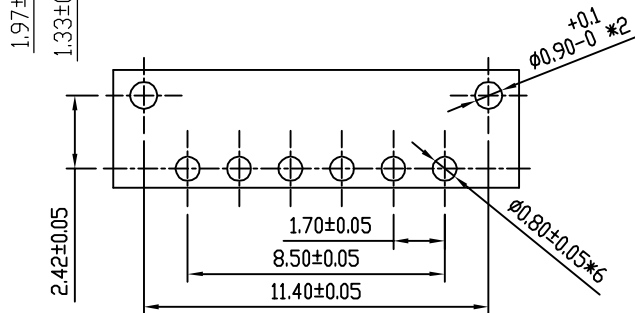
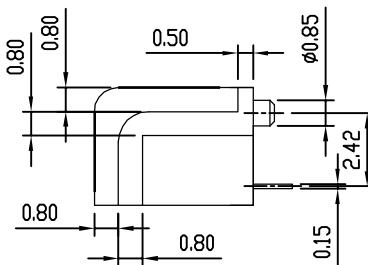
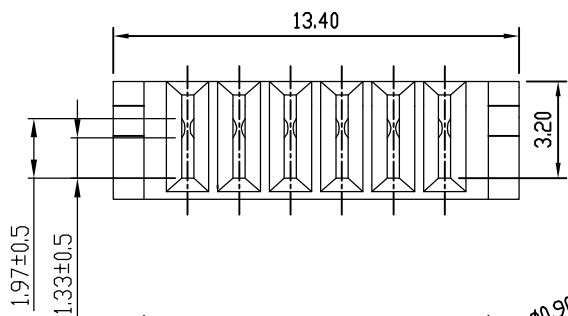


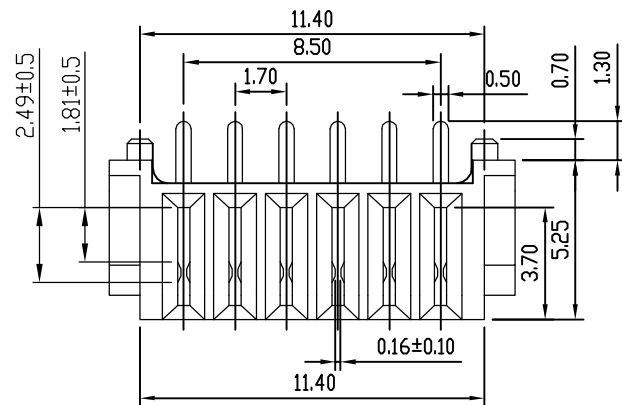

RECOMMENDED PCB LAYOUT

(TOP VIEW)

P.C.B. LAYOUT TOLERANCE: ± 0.10

NOTES :

1. MATERIAL :

a. HOUSING: PA9T OR OTHER HIGH PERFORMANCE RESINS, 94V-0 RATED.

b. TERMINAL : PHOSPHOR BRONZE, JIS C5191RH, $t=0.15\pm 0.01$

2. FINISH : GOLD PLATING OVER ALL, AND SELECT PLATING ON THE CONTACT AREA, WITH 50u"(min.) NICKEL UNDERPLATING OVERALL. COLOR OF HOUSING: BLACK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG $\pm$

照片框

ORDER INFORMATION

BCC17-SD52P-06-LF

SERIES | | | | LEADFREE
| | | | 06 WAY
FEMALE | | | | POST
| | | | HIGH 5.2mm
| | | | DIP 180°

DESCRIPTION: BATTERY CONN. FEMALE DIP