
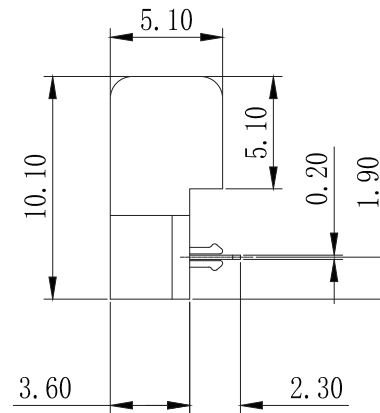


Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

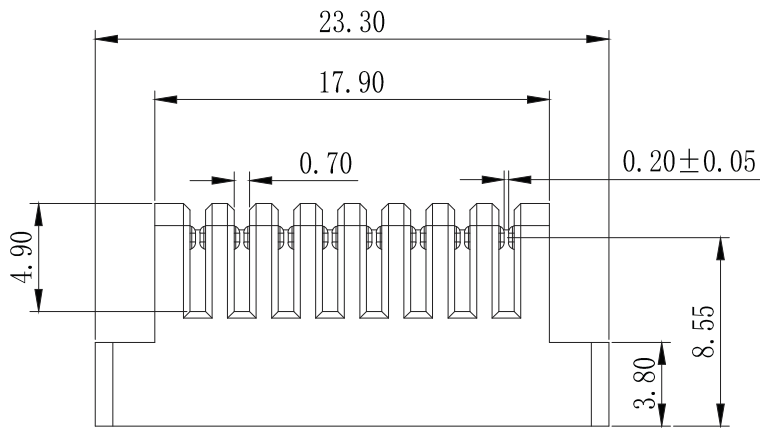

MATERIAL

INSULATOR : PA9T (UL94V-0)

CONTACT : C5191

CONTACT PLATED : GOLD OVER NICKEL OR TIN
 SPECIFICATION

VOLTAGERATING: 30VDC

CURRENT RATING : 7A/Pin

INSTANT CURRENT : 10A/Pin

CONTACT RESISTANCE : 20m Ω

INSULATION RESISTANCE : 100 M Ω Min.

DIELECTRIC VOLTAGE : 500V

OPERATING TEMPERATURE : -40° C ~ 105° C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, \pm
 .X \pm 0.30
 .XX \pm 0.20
 .XXX \pm
 ANG \pm

PJECTION

照片框

ORDER INFORMATION

BCC20-SR036Z-08-LF

SERIES LEADFREE
 08 WAY
 CLIP
 HIGH 3.6mm
 DIP 90°
 FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: