
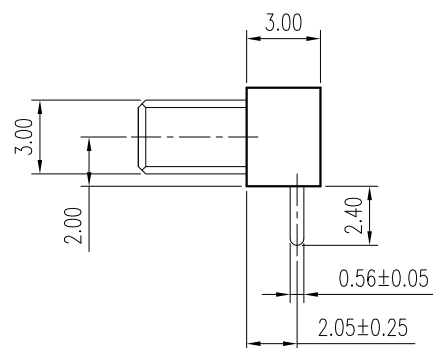



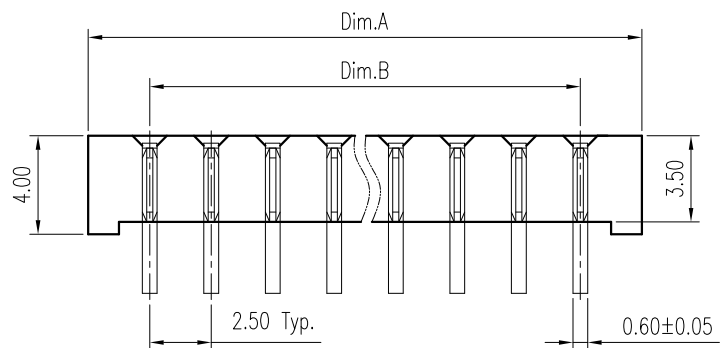


Notes:

1. Material :
Housing : Thermoplastic UL 94V-0
Terminal : Copper Alloy
2. Finished :
Terminal : Selected Gold on Contact Area, Gold Flash on Solder Tails, Both over 50u" Min. Ni Under-plated Overall

Dimension Information:

Part No.	Dim.	Dim.A	Dim.B
BCC25-PR30-03		10.00	5.00
BCC25-PR30-04		12.50	7.50
BCC25-PR30-05		15.00	10.00
BCC25-PR30-06		17.50	12.50
BCC25-PR30-07		20.00	15.00
BCC25-PR30-08		22.50	17.50
BCC25-PR30-09		25.50	20.00
BCC25-PR30-10		27.50	22.50

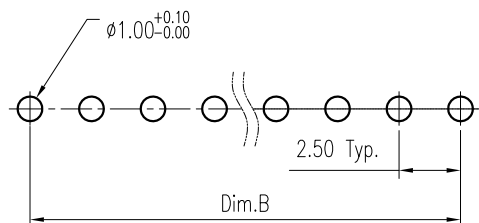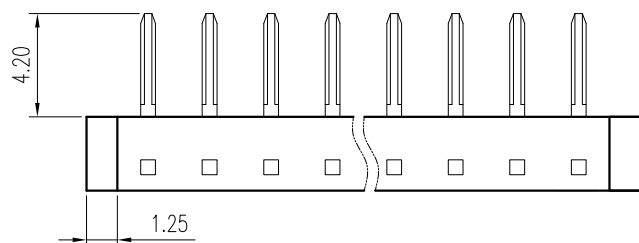

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

BCC25-PR30-xx-LF

SERIES LEADFREE
03~10 WAY
WIDTH 3.0mm
DIP 90°
MALE

DESCRIPTION: 2.5mm Pitch Battery Conn. Male Type