
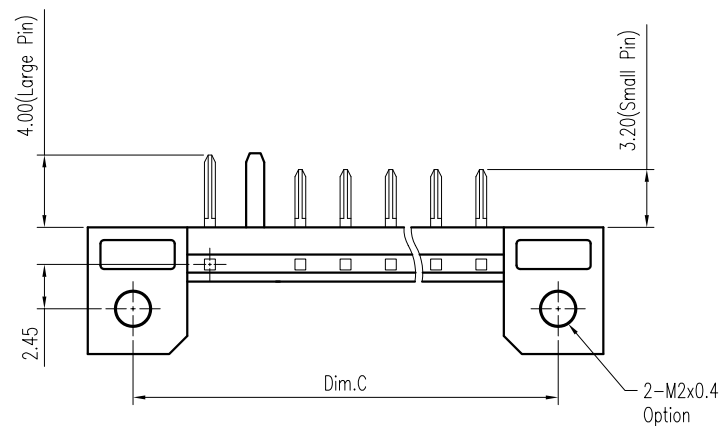
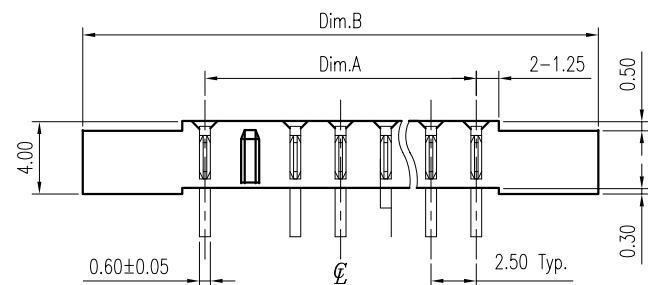


Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

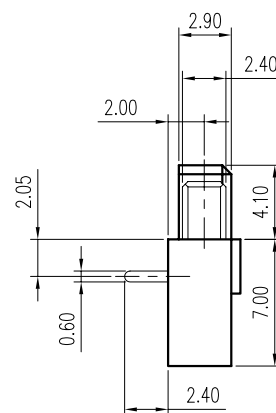

Notes:

1. Material :
Housing : Thermoplastic UL 94V-0 ,Black
Terminal : Copper Alloy
2. Finish :
Terminal : Selected Gold on Contact Area,
G/F on Solder Tails, Both over
50u" Min. Ni Under-plated Overall

Dimension Information:

Part No.	Dim.	Amount of Pins	Dim.A	Dim.B	Dim.C
BCC25-PR40L2E24-03	3	7.50	18.5	13.5	
BCC25-PR40L2E24-04	4	10.00	21.0	16.0	
BCC25-PR40L2E24-05	5	12.50	23.5	18.5	
BCC25-PR40L2E24-06	6	15.00	26.0	21.0	
BCC25-PR40L2E24-07	7	17.50	28.5	23.5	
BCC25-PR40L2E24-08	8	20.00	31.0	26.0	
BCC25-PR40L2E24-09	9	22.50	33.5	28.5	
BCC25-PR40L2E24-10	10	25.00	36.0	31.0	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.38
.XX $\pm$ 0.25
.XXX $\pm$ 0.13
ANG $\pm$

照片框

ORDER INFORMATION

BCC25-PR40L2E24-xx-LF

SERIES

MALE

L TYPE

HIGH 4.0mm
DIP 90°

LEADFREE
03~10 WAY

EAR 2.4Ø

DESCRIPTION: 2.5mm Pitch Battery Conn. Male Type