

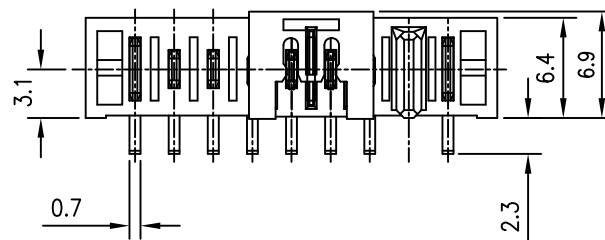
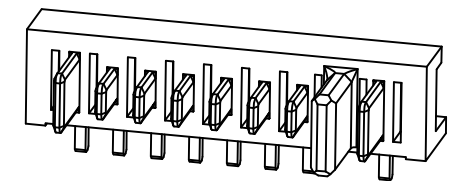


NOTES:

1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:BLACK.
 - 1.2 CONTACT: COPPER ALLOY
2. FINISH:
 - 2.1 CONTACT:
 - 5u" Au PLATING ON CONTACT AREA.
 - GOLD FLASH PLATING ON OVERALL.
 - 50u" MIN. NICKEL UNDERPLATING OVERALL.
3. REFLOW SOLDER CAPABLE TO 260°C



WITH COVER DRAWING



MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG $\pm 2^\circ$

PPOJECTION

照片框

ORDER INFORMATION

BCC25-PR64C-08R2-LF

SERIES

MALE

CAP

08 WAY

HIGH 6.4mm

DIP 90°

LEADFREE

RIGHT KEY #2

DESCRIPTION: 2.50mm Pitch Battery Connector TYPE H=6.4mm