


(右防呆)

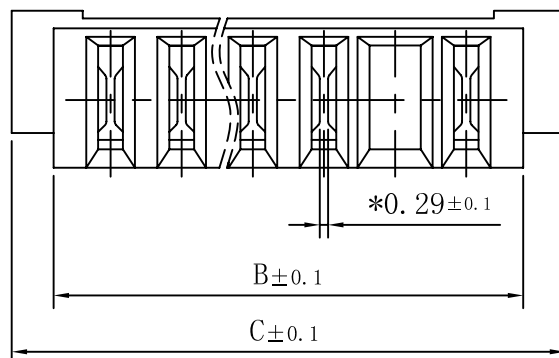

右防呆	Dim. A	Dim. B	Dim. C
BCC25-SDxxR2-03	7.5	11.5	14.45
BCC25-SDxxR2-04	10.0	14.0	16.95
BCC25-SDxxR2-05	12.5	16.5	19.45
BCC25-SDxxR2-06	15.0	19.0	21.95
BCC25-SDxxR2-07	17.5	21.5	24.45
BCC25-SDxxR2-08	20.0	24.0	26.95
BCC25-SDxxR2-09	22.5	26.5	29.45
BCC25-SDxxR2-10	25.0	29.0	31.95

*Material

Insulator: PA-6T (UL94V-0).

Contact: Copper Alloy.

Contact Plated: Gold over Nickel.

*Ratings

Rating current: 5.0 A/pin.

Instant current: 7.0 A/pin.

Rating voltage: 125 V AC/1 minute.

Operating temperature: -40°C to +105°C.

Resistance to soldering: 260°C, 5 second.

*Electrical Characteristic

Withstanding Voltage: DC 500V.


Insulation Resistance: 100 MΩ Min..

Contact Resistance: 30mΩ Max..

*Mechanical Characteristic

Mating force: 150g/pin max..

Contact retention force: 500g min..

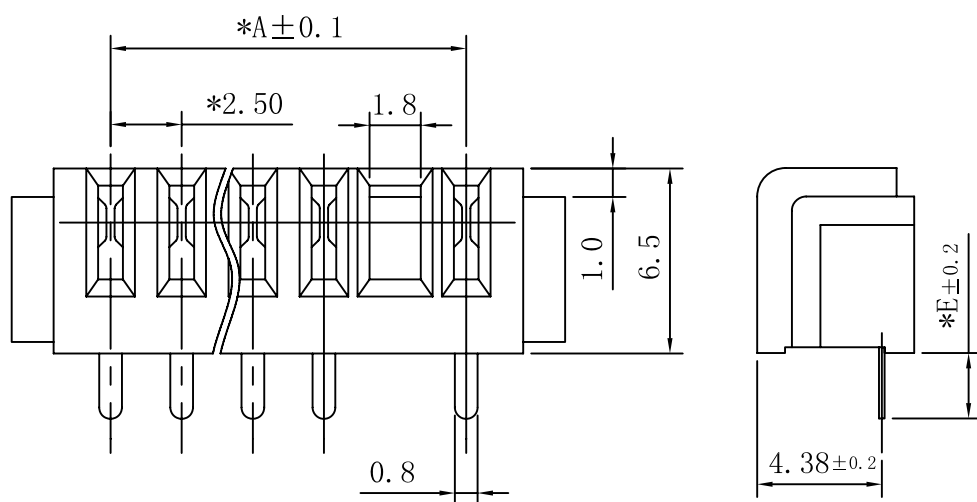

	BCC25-SD15R2-xx	BCC25-SD23R2-xx	BCC25-SD30R2-xx
DIM. E	1.5±0.25mm	2.3±0.25mm	3.0±0.25mm

	項次	名稱	零件料號	數量
BCC25-SDxxR2-xx (右防呆)	1	膠芯	BCC25-H	1 PCS
	2	端子	BCC25-T	依膠芯pin數

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

BCC25-SDxxR2-xx-LF

SERIES
LEADFREE
03~10WAY
RIGHT 2
D15:DIP 1.5mm
D23:DIP 2.3mm
D30:DIP 3.0mm
FEMALE

DESCRIPTION: