
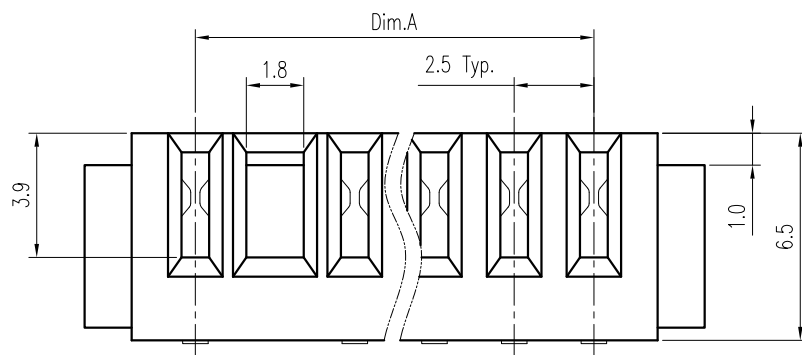
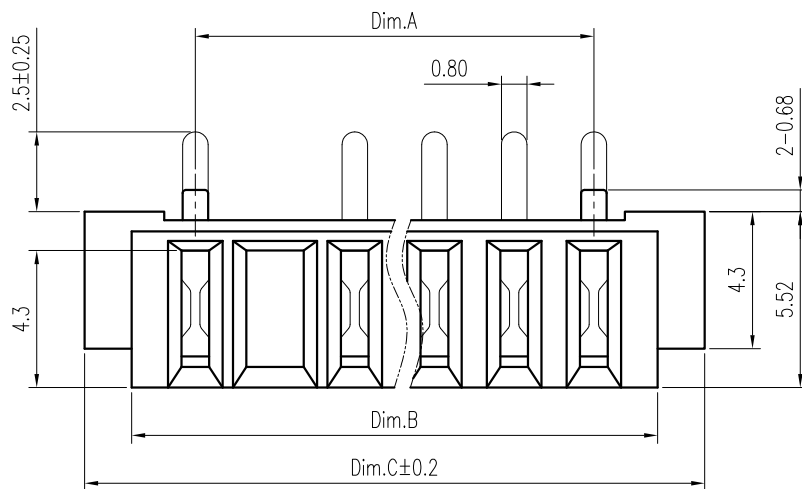


Notes:

- Material :
Housing : Thermoplastic UL 94V-0 , Black
Terminal : Copper Alloy
- Finish :
Terminal : Selected Gold on Contact Area, Gold Flash on Solder Tails, Both over 50u" Min. Ni Under-plated Overall

Dimension Information:

Part No.	Dim.	Amount of Pins	Dim.A	Dim.B	Dim.C
BCC25-SR55R2P-03	3	3	7.5	11.5	14.45
BCC25-SR55R2P-04	4	4	10.0	14.0	16.95
BCC25-SR55R2P-05	5	5	12.5	16.5	19.45
BCC25-SR55R2P-06	6	6	15.0	19.0	21.95
BCC25-SR55R2P-07	7	7	17.5	21.5	24.45
BCC25-SR55R2P-08	8	8	20.0	24.0	26.95
BCC25-SR55R2P-09	9	9	22.5	26.5	29.45
BCC25-SR55R2P-10	10	10	25.0	29.0	31.95

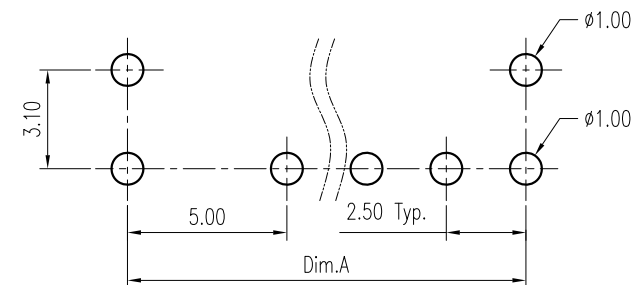

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

BCC25-SR55R2P-xx-LF

SERIES

POST

RIGHT 2

DIP 90° / 5.52mm

FEMALE

LEADFREE

03~10 WAY

DESCRIPTION: 2.5mm Pitch Battery Conn. Female Type