


Notes:

1. Material :
 Housing : Thermoplastic UL 94V-0 , Black
 Terminal : Copper Alloy
2. Finish :
 Terminal : 3u" Min. Gold on Contact Area, 1u" Min. Gold on Solder Tails, Both over 50u" Min. Ni Under-plated Overall

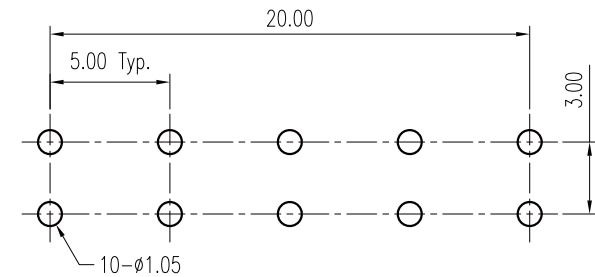

Recommended P.C.B. Layout
 Layout Tolerance = ± 0.05 mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

BCC50-PD-05-LF

SERIES | LEADFREE
 | 05 WAY
 | DIP 180°
 MALE

DESCRIPTION: 5.0mm Pitch Battery Conn. Male Type