
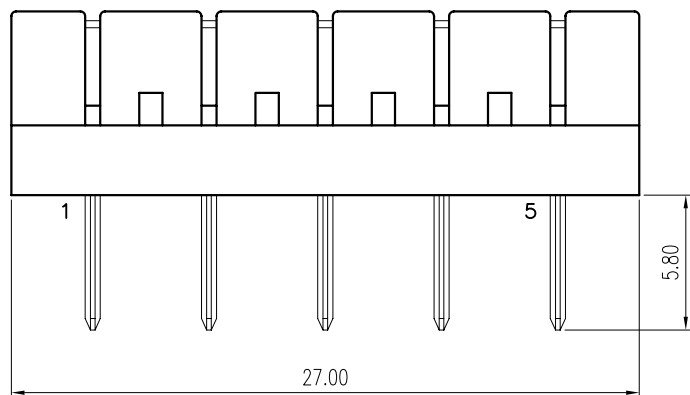
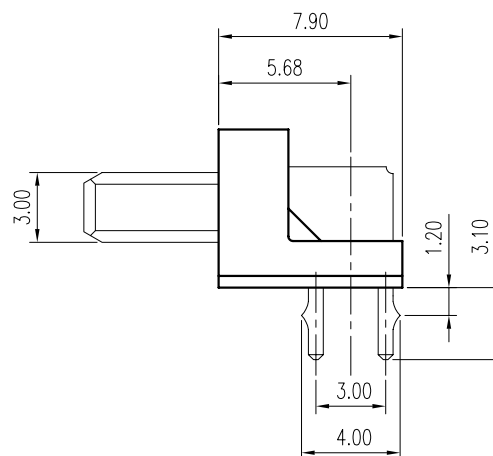


Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

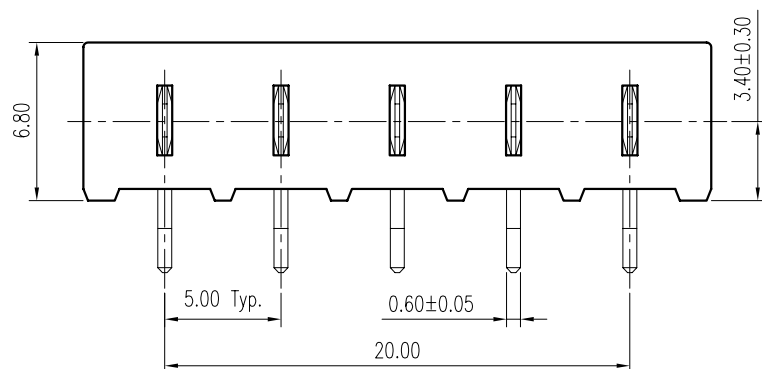

Notes:

1. Material :
Housing : Thermoplastic UL 94V-0 ,Black
Terminal : Copper Alloy
2. Finish :
Terminal : Selected Gold on Contact Area,
Gold Flash on Solder Tails, Both over
50u" Min. Ni Under-plated Overall

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.38
.XX $\pm$ 0.25
.XXX $\pm$ 0.13
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

BCC50-PR68-05-LF

SERIES

LEADFREE

05 WAY

HIGH 6.8mm

DIP 90°

MALE

DESCRIPTION: 5.0mm Pitch Battery Conn. Male Type