
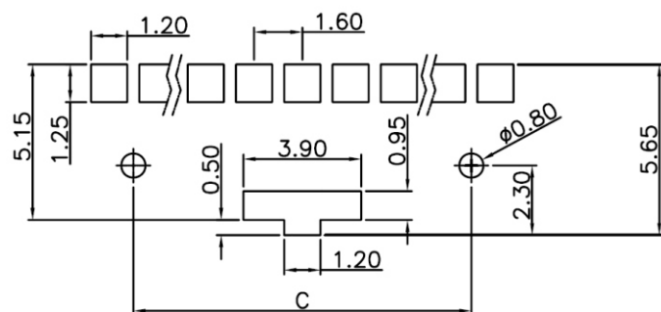
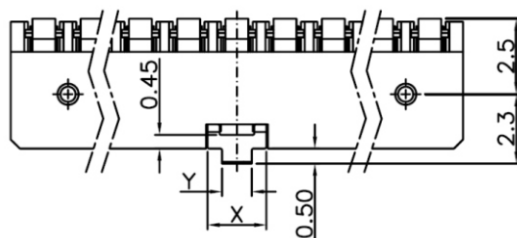

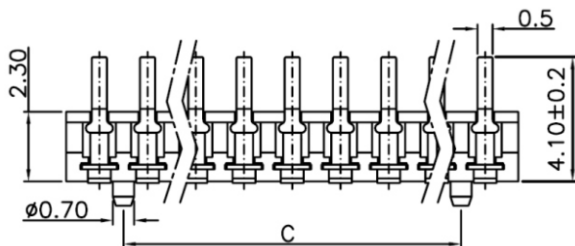
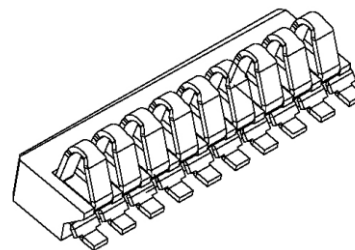


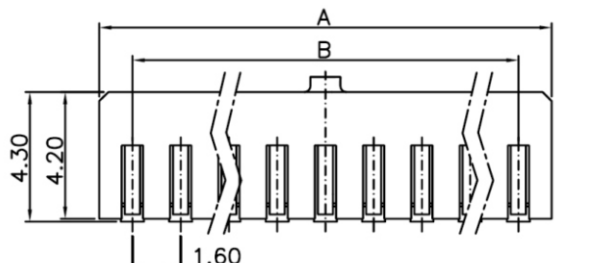

P.C. Board Layout
(Tolerance:±0.05)

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Becu.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -55°C~+125°C .

***RoHS Compliant**

Dimensions	odd number position	even number position
X	1.95	3.68
Y	0.99	1.04
P/N	3 Thru 9	
A	1.60 X NO.OF Positions +0.60	
B	1.60 X NO.OF Positions -1.60	
C	1.60 X NO.OF Positions -3.20	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BCS16-V23EP2-xx-LF

SERIES 180°SMT
LEADFREE
02-09 WAY
POST
EAR
HIGH 2.3mm

DESCRIPTION: