
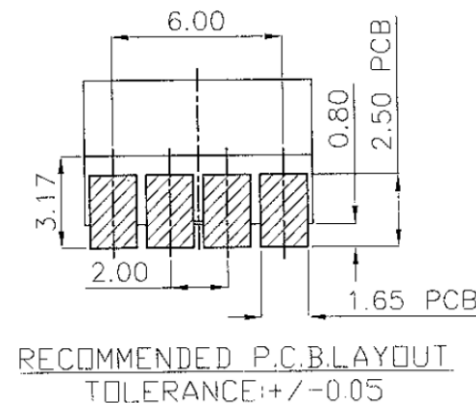


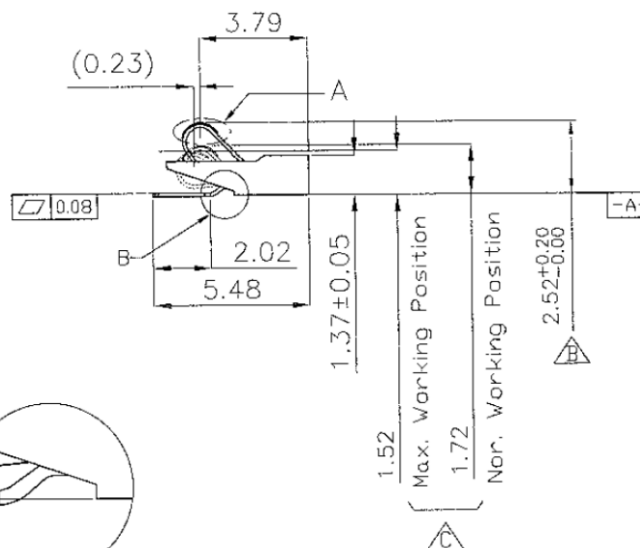
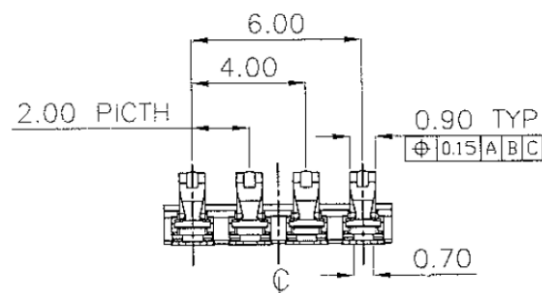



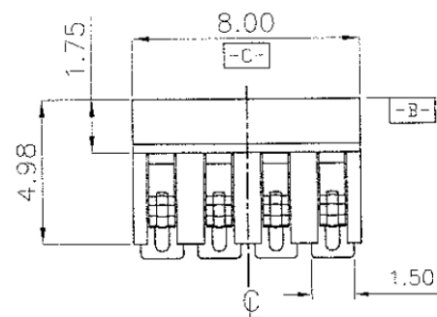

NOTES:

1. MATERIAL:

HOUSING: HIGH TEMPERATURE THERMO PLASTIC
UL94V-0

CONTACT: COPPER ALLOY

2. FINISH:

TERMINAL:

CONTACT AREA: GOLD PL.

SOLDERING AREA: MATTE TIN PL.80u"~120u"

UNDER PL: NICKEL PL.50u"~100u"

3. NO BURR ALLOWED AT CONTACT SIDE

& ALL OTHER AREA 0.05MM MAX.

4. NORMAL FORCE: 220g MIN. @ 1.72MM. FROM PCB

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

BCS20-V13X-04-LF

SERIES

LEADFREE

04 WAY

NON POST

HIGH 1.37mm

180°SMT

DESCRIPTION: 4 PIN 2.00mm PITCH BATTERY CONNECTOR