



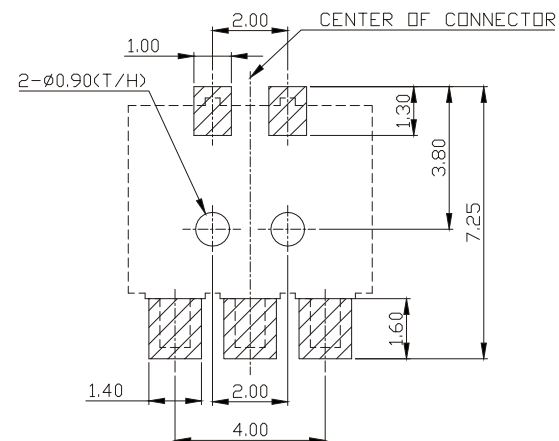


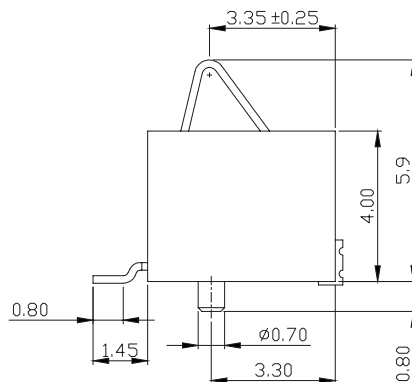

SECTION A-A

NOTES:



1. MATERIAL :
TERMINAL : COPPER ALLOY,
HOUSING : THERMOPLASTIC,COLOR IN BLACK , UL94V-0
2. FINISH :
UNDERPLATING: NICKEL PLATING FOR ALL 50 μ " MIN.
SOLDER TAIL PLATING: TINKLEAD FREE) PLATING 100 μ " MIN.
CONTACT AREA IS PLATED WITH 10 μ " GOLD
3. PACKAGING : TAPE & REEL,

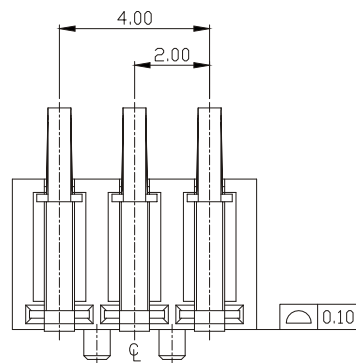

RECOMMEND P.C.B. LAYOUT

GENERAL TOLERANCE: ± 0.05

□ :SOLDER PAD AREA



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

BCS20-V40EP2-03-LF

SERIES

180°SMT

LEADFREE

03 WAY

POST

EAR

HIGH 4.0mm

DESCRIPTION: