
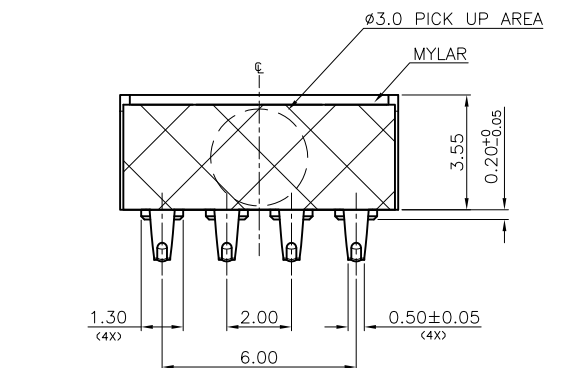
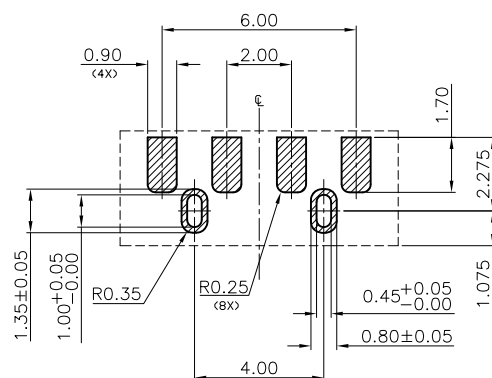

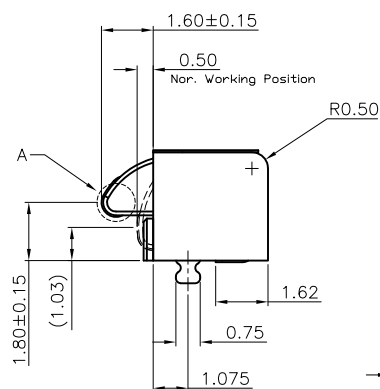


3D VIEW

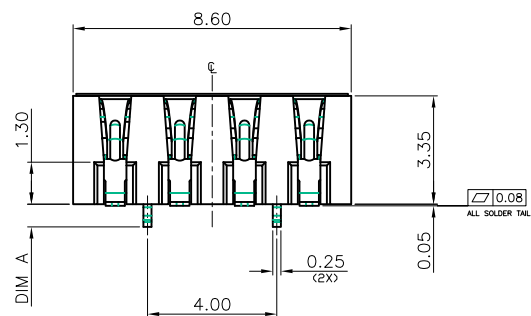

RECOMMENDED PCB LAYOUT
TOLERANCE±0.05mm

NOTES:

1. MATERIAL:
 - 1.1 HOUSING: LCP, UL94 V-0, COLOR: BLACK
 - 1.2 CONTACT: TI-CU ALLOY, T=0.12mm
 - 1.3 POST: BRASS, T=0.25mm
2. FINISH:
 - 2.1 CONTACT:
 - GOLD PLATING ON CONTACT AREA,
 - TIN 100~150u" PLATING ON SOLDER TAIL,
 - NICKEL 30~120u" UNDERPLATING OVERALL.
 - 2.2 POST
 - TIN 100~150u" PLATING OVERALL,
 - NICKEL 80~150u" PLATING OVERALL.
3. NORMAL FORCE: 1.5N@0.50mm FROM HOUSING
4. DURABILITY: 5000 CYCLES
5. ROHS PRODUCET
6. NO BURR ALLOWED AT CONTACT SIDE & ALL OTHER AREA 0.05MM MAX.

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

BCS20-W33M1C-04-LF

SERIES T LEADFREE
90°SMT 04 WAY
MYLAR
METAL FOOT
HIGH 3.35mm

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.15
ANG ± 1°

PPOJECTION

DESCRIPTION: 4 PIN 2.0mm PITCH BATTERY CONNECTOR