
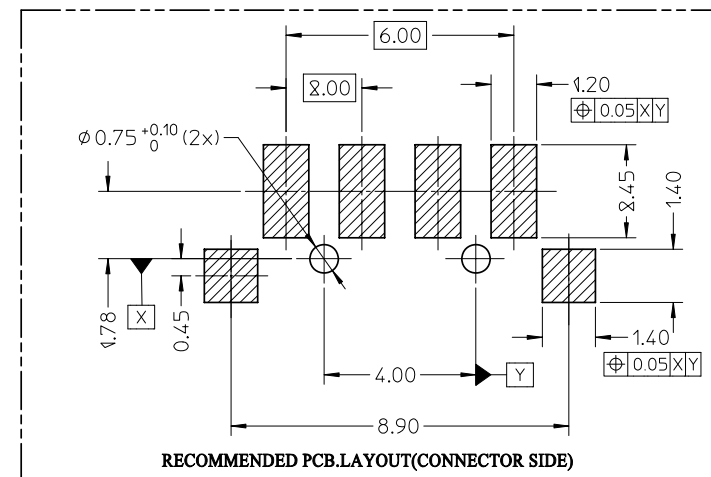
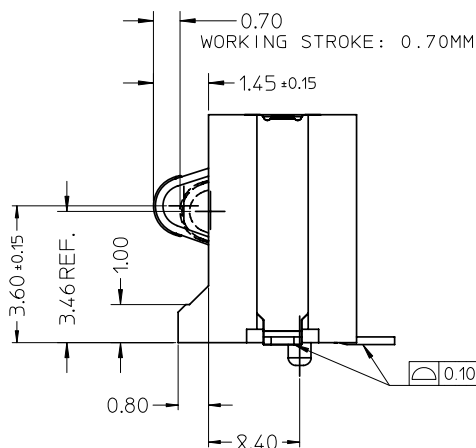
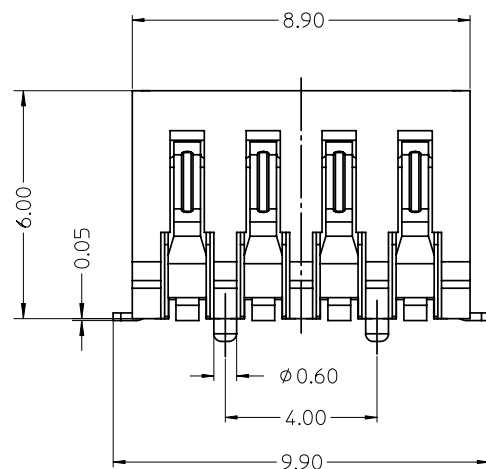
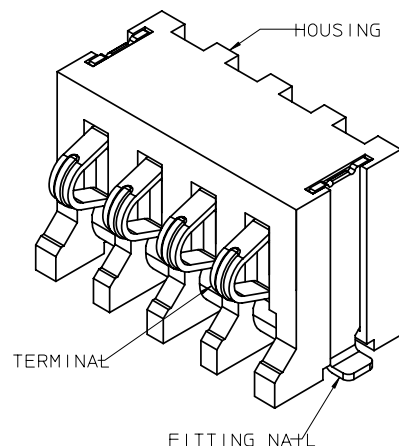


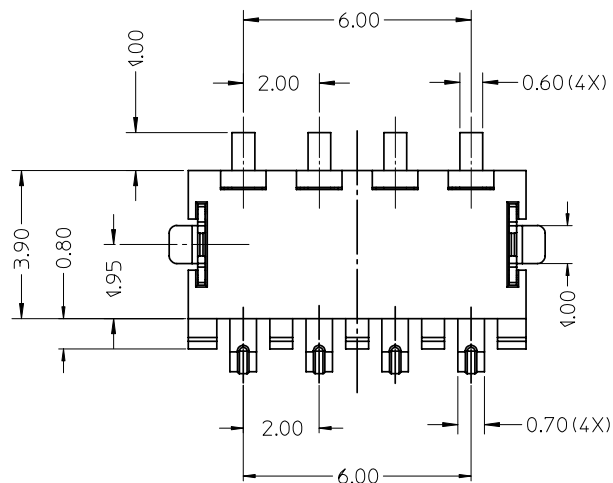

NOTES:

1. MATERIAL:

HOUSING: THERMOPLASTIL UL94V-0,BLACK

TERMINAL: COPPER ALLOY

FITTING NAIL: COPPER ALLOY

2. PLATING:

TERMINAL: GOLD PLATED ON CONTACT AREA

GOLD FLASH ON THE OTHER AREA

NICKEL UNDERPLATED OVER ALL

FITTING NAIL: NICKEL UNDERPLATED OVER ALL

MATTE TIN PLATED OVER ALL

3. PRODUCT SPECIFICATION: BTP-PS003

4. PACKING SPECIFICATION: BTP-04CD3B_PK001

5. RECOMMENDED MATING PART: N/A

6. ENVIRONMENTAL:

OPERATION TEMPERATURE: -40℃~+85℃

7. PRODUCT COMPLIANT TO ROHS AND HALOGEN FREE.

3	FITTING NAIL	2	COPPER ALLOY	NICKEL 1.27-3.81 MICRONS UNDER PLATING MATTE TIN 2.54-5.08 MICRONS PLATING	T=0.20 MM
2	TERMINAL	4	COPPER ALLOY	GOLD FLASH OVER 1.27-3.81 MICRONS NICKEL GOLD 0.381 MICRONS PLATED ON CONTACT AREA	T=0.20 MM
1	HOUSING	1	THERMOPLASTIC	---	UL94V-0,BLA
NO.	DESCRIPTION	QTY.	MATERIAL	FINISH	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 3°

照片框

ORDER INFORMATION

BCS20-W60EP2-04-LF

SERIES

LEADFREE

04 WAY

POST

EAR

HIGH 6.0mm

90°SMT

DESCRIPTION: 2.00MM PITCH 4 PIN BATTERY CONNECTOR COMPRESSION TYPE