
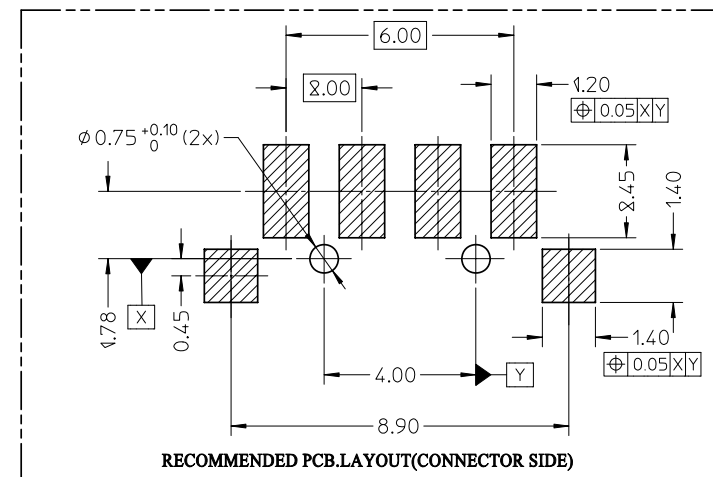
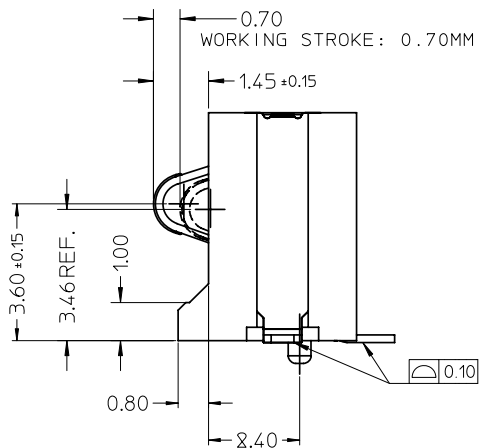
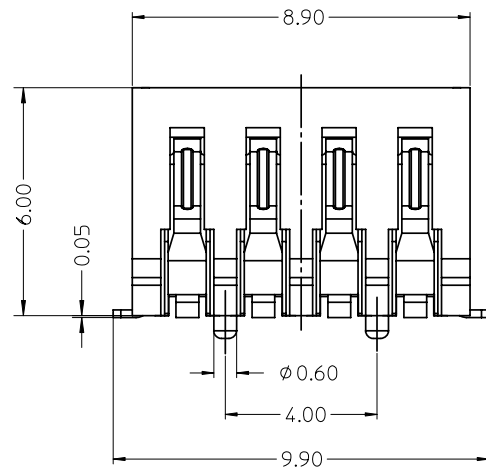
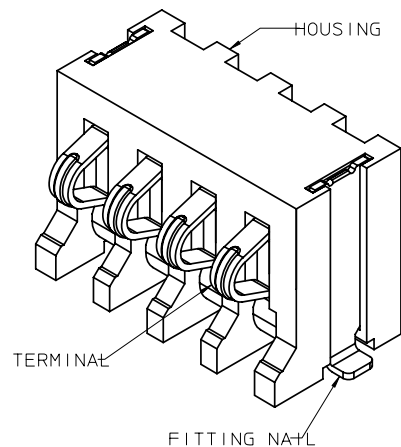


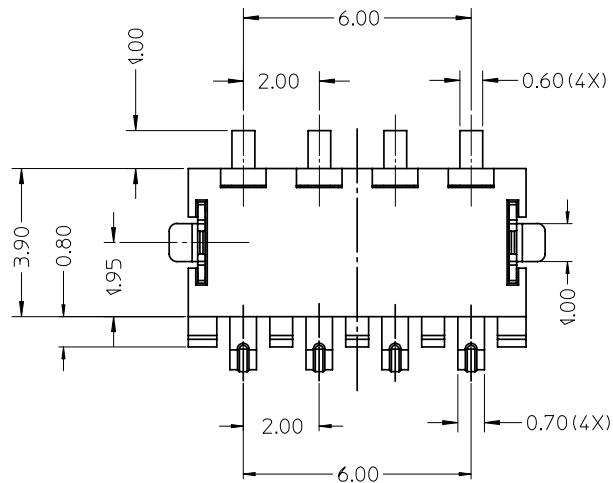

NOTES:

1. MATERIAL:

HOUSING: THERMOPLASTIL UL94V-0,BLACK

TERMINAL: COPPER ALLOY

FITTING NAIL: COPPER ALLOY

2. PLATING:

TERMINAL: GOLD PLATED ON CONTACT AREA

GOLD FLASH ON THE OTHER AREA

NICKEL UNDERPLATED OVER ALL

FITTING NAIL: NICKEL UNDERPLATED OVER ALL

MATTE TIN PLATED OVER ALL

3. PRODUCT SPECIFICATION: BTP-PS003

4. PACKING SPECIFICATION: BTP-04CD3B_PK001

5. RECOMMENDED MATING PART: N/A

6. ENVIRONMENTAL:

OPERATION TEMPERATURE: -40℃~+85℃

7. PRODUCT COMPLIANT TO ROHS AND HALOGEN FREE.

3	FITTING NAIL	2	COPPER ALLOY	NICKEL 1.27-3.81 MICRONS UNDER PLATING MATTE TIN 2.54-5.08 MICRONS PLATING	T=0.20 MM
2	TERMINAL	4	COPPER ALLOY	GOLD FLASH OVER 1.27-3.81 MICRONS NICKEL GOLD 0.381 MICRONS PLATED ON CONTACT AREA	T=0.20 MM
1	HOUSING	1	THERMOPLASTIC	---	UL94V-0,BLA
NO.	DESCRIPTION	QTY.	MATERIAL	FINISH	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 3°

照片框

ORDER INFORMATION

BCS20-W60EP2R-04-LF

SERIES

LEADFREE

04 WAY

REEL


POST

EAR

HIGH 6.0mm

90°SMT


DESCRIPTION: 2.00MM PITCH 4 PIN BATTERY CONNECTOR COMPRESSION TYPE

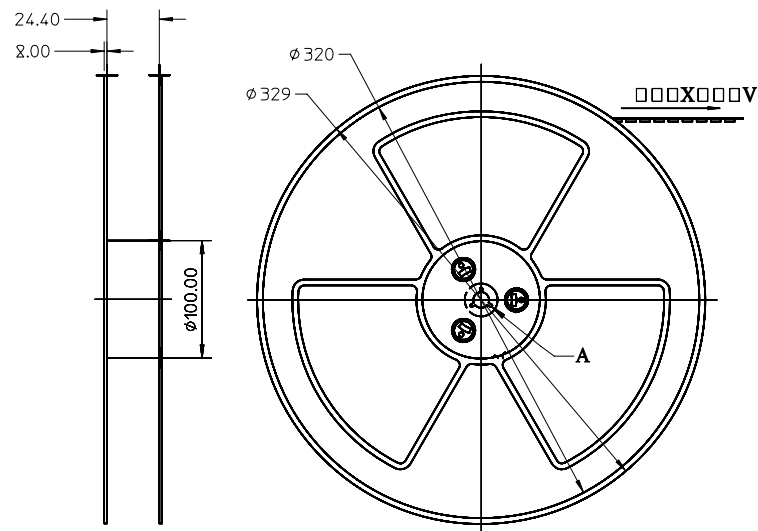

NOTES:

1. NUMBER OF CONNECTORS: 500 PCS/REEL


2.

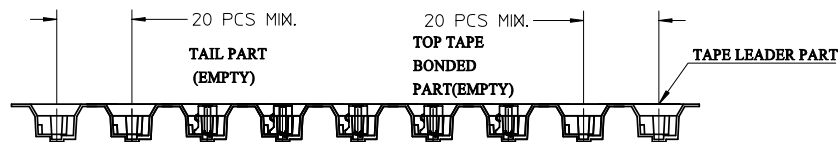

3. PEEL-OFF FORCE OF TOP TAPE: 0.1~1.3N (10.2~130gf)

(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)

(PEEL-OFF SPEED: 300mm/min REF)

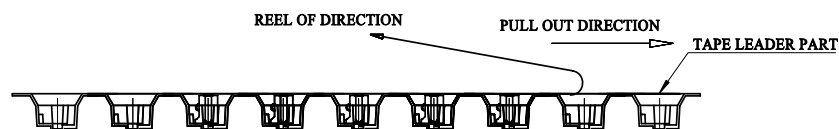

4. ALL DIMENSIONS MEET EIA-481-2-A REQUIREMENTS.




5. MATERIAL: BLACK CONDUCTIVE POLYSTYRENE ALLOY.

6. THICKNESS: THICKNESS: T=0.50 MM

7. PACKING LENGTH PER 22" REEL: 26.0 METERS(1:3)

8. COMPONENT LOAD PER 13" REEL: 500 PCS

9. PRODUCT COMPLIANT TO THE REQUEST OF ROHS

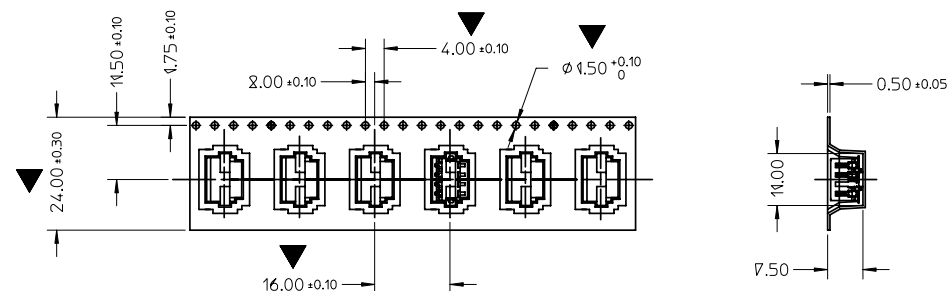

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.40
.XX ± 0.20
.XXX ± 0.10
ANG ± 2°


PPOJECTION

ORDER INFORMATION

BCS20-W60EP2R-04-LF

SERIES T LEADFREE
90°SMT T 04 WAY
REEL
POST
EAR
HIGH 6.0mm

DESCRIPTION: 4 PIN 2.00MM PITCH BATTERY CONNECTOR

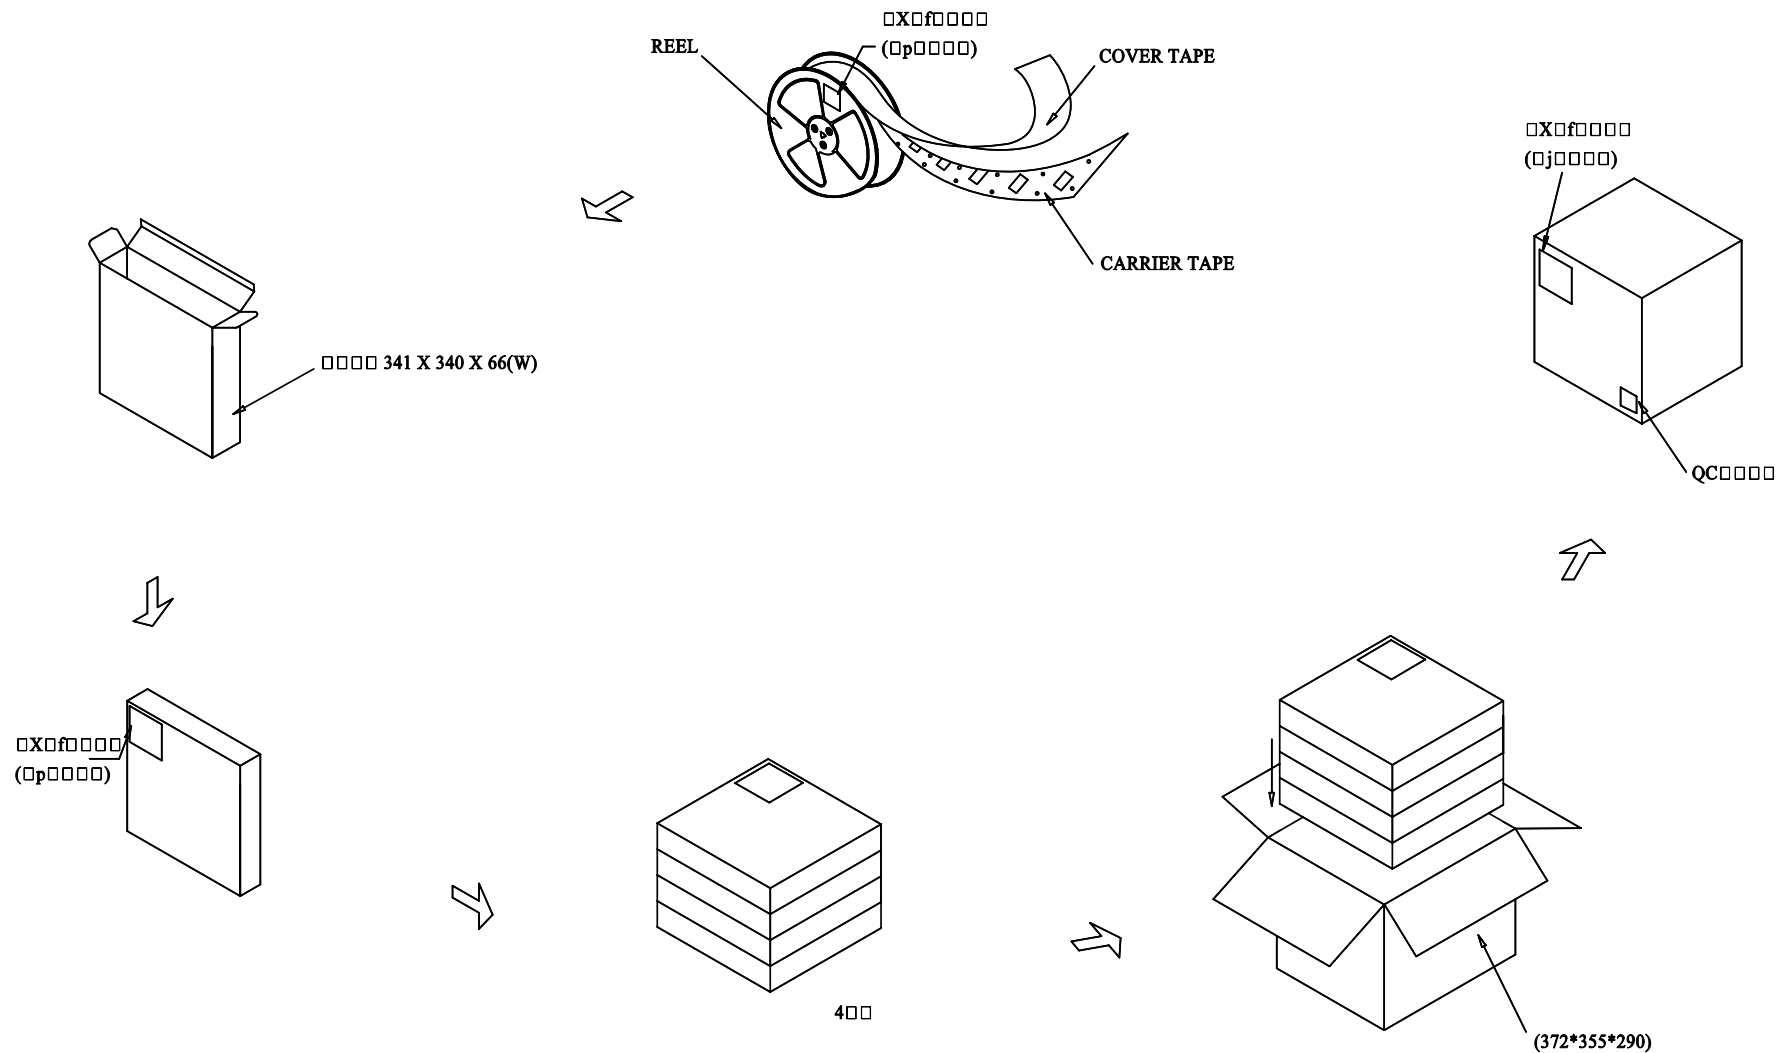

500 PCS/REEL, 8 REELS/CARTON=4000 PCS.
 NET WEIGHT: 0.30g/PCS, 150g/REEL, 1200g/CARTON
 GROSS WEIGHT: 5000g/REEL, 2560g/CARTON

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.40
 .XX ± 0.20
 .XXX ± 0.10
 ANG ± 2°

照片框

ORDER INFORMATION

BCS20-W60EP2R-04-LF

SERIES

90°SMT

REEL

POST

EAR

HIGH 6.0mm

LEADFREE

04 WAY

DESCRIPTION: 4 PIN 2.00MM PITCH BATTERY CONNECTOR