
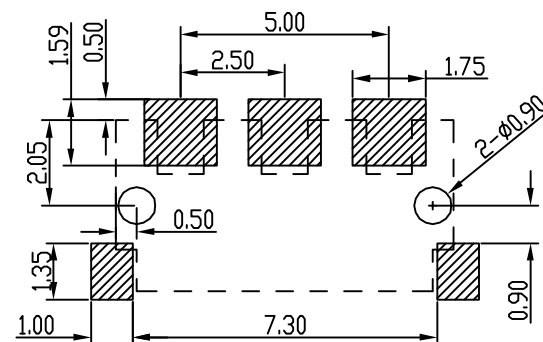
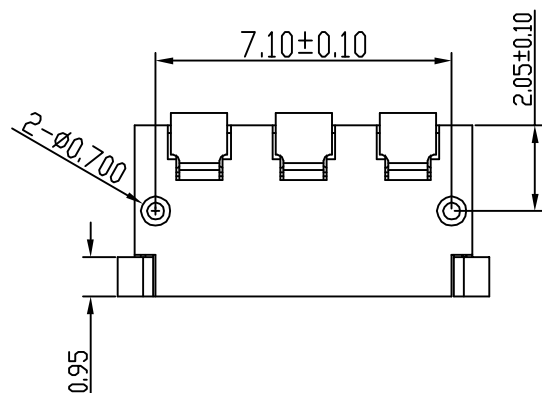
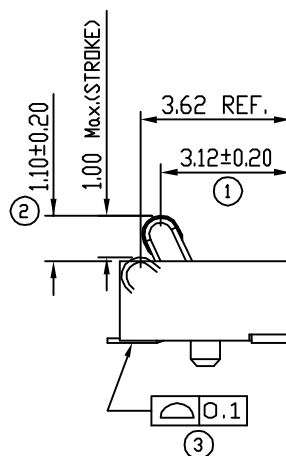


- NOTE :
- 1.MATERIAL:
HOUSING:HIGH TEMP. THERMOPLASTIC,UL94V-0,COLOR BLACK
CONTACT:CU ALLOY,T=0.12
TAB:CU ALLOY,T=0.20
 - 2.FINISH:
CONTACT:
>XU" GOLD PLATING ON CONTACT AREA;
>0.5u" GOLD PLATING ON SOLDER TAILS;
NICKEL UNDERPLATING OVER ALL.
TAB:
MATTE TIN OVER ALL.
 - 3.SOLDER HEAT RESISTANCE: REFLOW SOLDERING 260° FOR 5 SEC.
 - 4.FOR REFLOW SOLDERING LEAD FREE PROCESS.

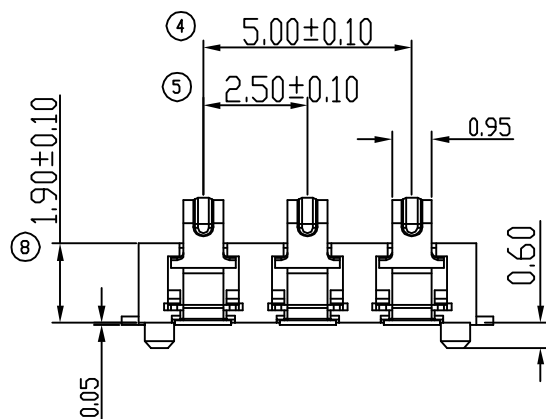

RECOMMENDED PCB. BOARD LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BCS25-V19EP2-03-LF

SERIES

LEADFREE

03 WAY

EAR+POST

HIGH 1.9mm

180°SMT

DESCRIPTION: