


P.C.B. LAYOUT
TOP VIEW ±0.05

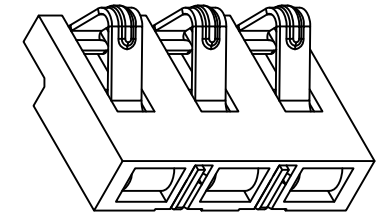

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 PAD: COPPER ALLOY, TIN PLATED
 TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 2 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 50m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±

PJECTION

照片框

ORDER INFORMATION

BCS25-V20E1-03-LF

SERIES | | | LEADFREE
 | | | 03 WAY
 EAR
 HIGH 2.0mm
 180°SMT

DESCRIPTION: BATTERY, 2.50mm PITCH, PCB MOUNT, VERTICAL SMT, WITH PAD