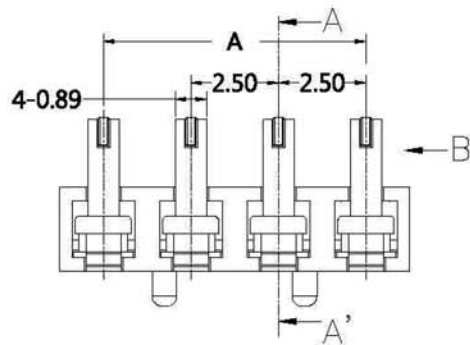


SPECIFICATION





Current Rating: 3A DC 20V

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Dielectric Voltage: 500V AC for one minute

Life Test: 10,000 Cycles

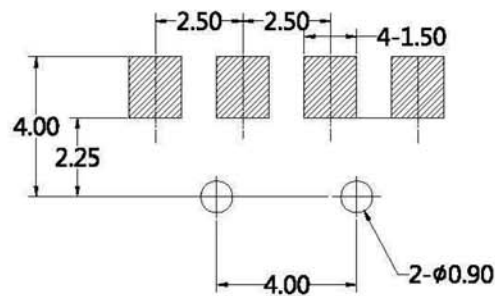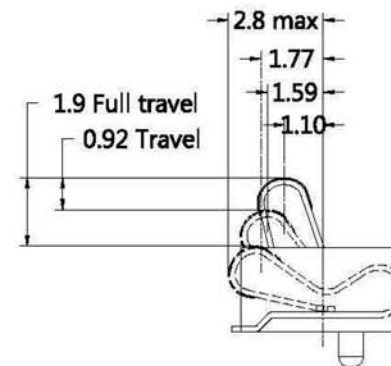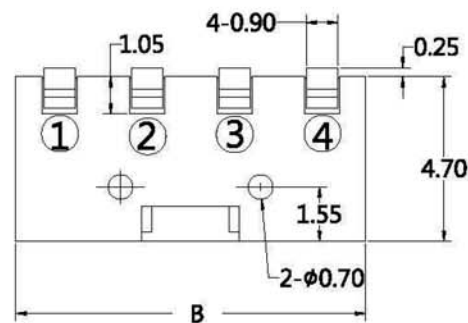

P.C.B. LAYOUT

No. of Contacts	Dimensions	
	A	B
3	5.00	7.50
4	7.50	10.00
5	10.00	12.50
6	12.50	15.00

No.	Name	Material	Q'ty	Finish
1	Contact Terminal	Beryllium Copper	N	Gold Plated
2	Housing	PPA	1	Black

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

BCS25-V24P1-xx-LF

SERIES POST HIGH 2.4mm 180°SMT LEADFREE 03-06 WAY

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.10
.XXX ± 0.05
ANG ±

DESCRIPTION: