

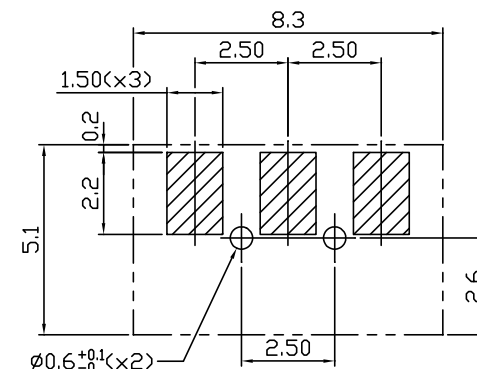
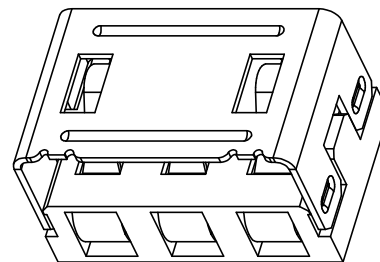






◆ Assembly dim.

■ Functionally dim.


● Control dim.



RECOMMENDED PCB LAYOUT


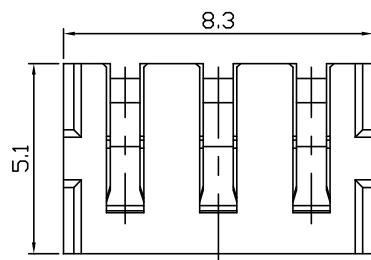


CONTACT HEIGHT
AFTER MATED

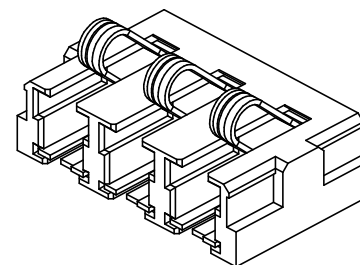

Material & Finish :

1. Housing : Thermal Plastic, Black, UL94-V0.
2. Cover : STAINLESS STEEL
3. Contact : Copper alloy, $t=0.15\text{mm}$.
Plating : Contact area 30u" gold,
solder area 100u" tin (lead free),
other area gold flash,
overall 50u" nickel under plated.

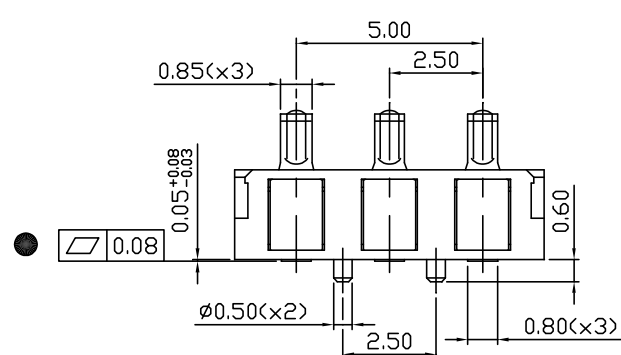

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.15
.XX ± 0.10
.XXX ±
ANG ±

照片框

ORDER INFORMATION

BCS25-V24PC-03-LF

SERIES
LEADFREE
03 WAY
CAP
POST
HIGH 2.4mm
180°SMT

DESCRIPTION: Battery Conn. 3 Pins