

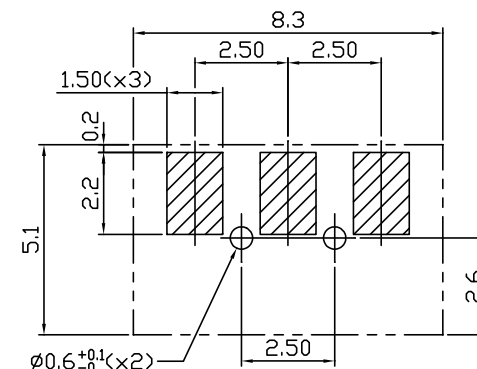
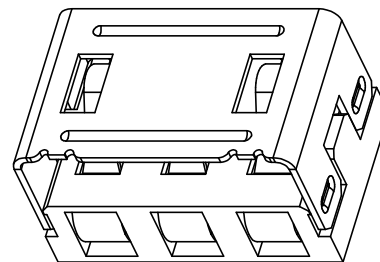






◆ Assembly dim.

■ Functionally dim.




● Control dim.



RECOMMENDED PCB LAYOUT

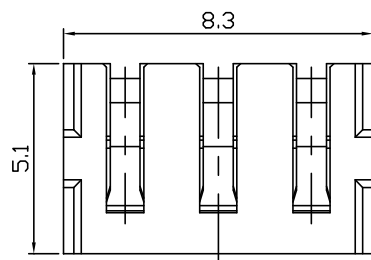

CONTACT HEIGHT
AFTER MATED

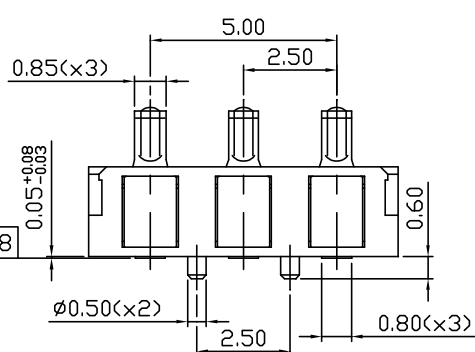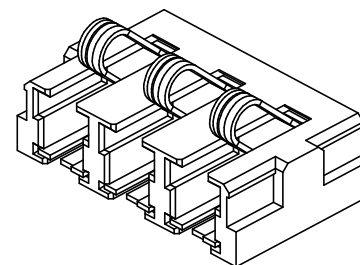

Material & Finish :

1. Housing : Thermal Plastic, Black, UL94-V0.
2. Cover : STAINLESS STEEL
3. Contact : Copper alloy, $t=0.15\text{mm}$.
Plating : Contact area $30\mu\text{''}$ gold,
solder area $100\mu\text{''}$ tin (lead free),
other area gold flash,
overall $50\mu\text{''}$ nickel under plated.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.15
.XX ± 0.10
.XXX ±
ANG ±

照片框

ORDER INFORMATION

BCS25-V24PCR-03-LF

SERIES

REEL

CAP

POST

HIGH 2.4mm

180°SMT

LEADFREE




03 WAY

DESCRIPTION: Battery Conn. 3 Pins






- ◆ Assembly dim.
- Functionally dim.
- Control dim.

成品出料帶方向

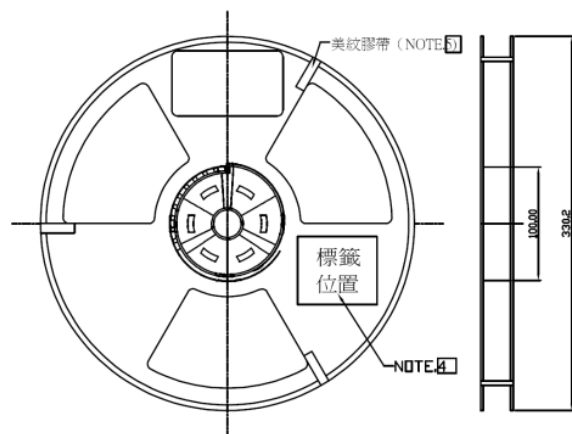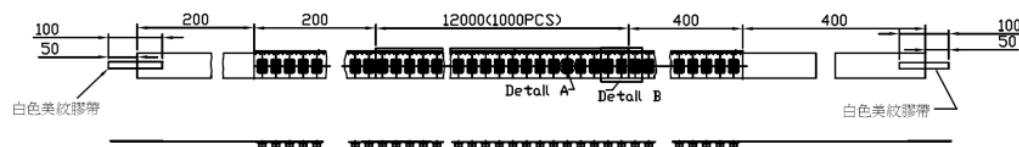


裝成品料帶方式




NOTE:

- 1. 包裝準備明細與方式.

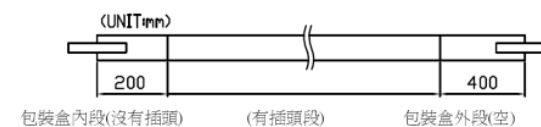

- 2. 封盒塑蓋膠帶分開磅力: 15-80 gf

膠帶分開的方向與角度

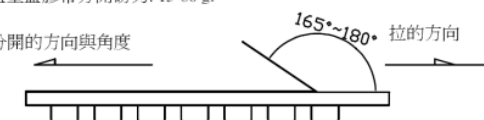

- 3. 塑盤每捲數量1000pcs.

- 4. 請依圖面附上合格標籤。

- 5. 每捲須用三條美紋膠帶貼上Plastic(依圖面), L=10cm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

BCS25-V24PCR-03-LF

SERIES

LEADFREE

03 WAY

REEL

CAP

POST

HIGH 2.4mm

180°SMT

DESCRIPTION: BATTERY CONN. 3P