

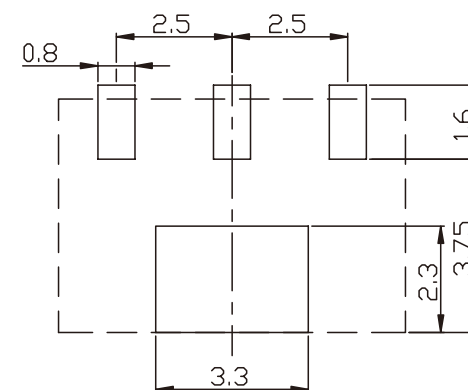
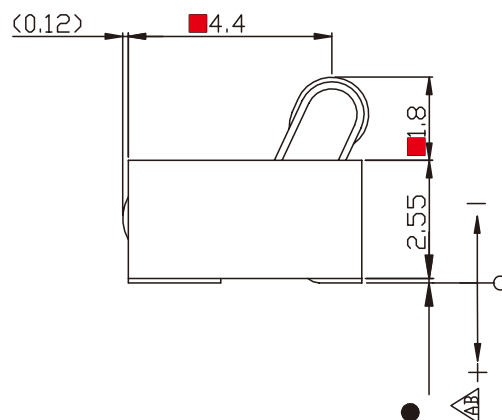
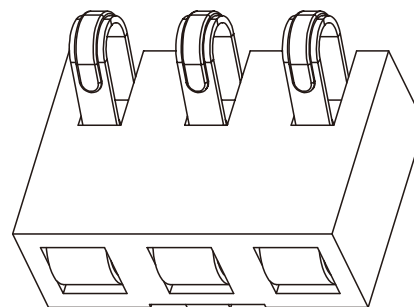
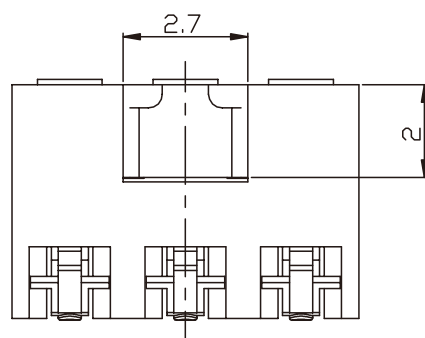


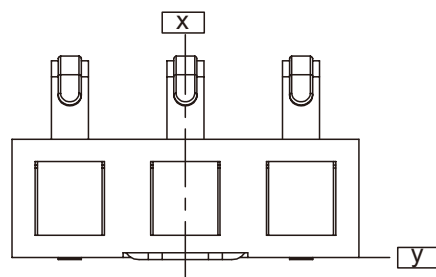

- ◆ Assembly dim.
- Functionally dim.
- Control dim.

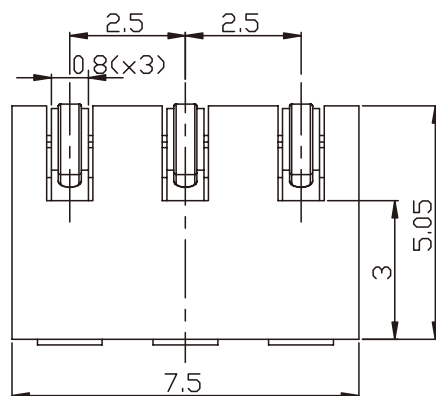

RECOMMENDED PCB LAYOUT

Notes:

- Material & Plating : Housing LCP.
1-1. Housing : LCP, Black.
1-2. Contact : copper alloy.
Ni 90u", Au 30u", Sn 150u".
1-3. Solder Pin : copper alloy.
- Coplanarity: 0.1mm.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.15
.XX ± 0.10
.XXX ±
ANG ±

照片框

ORDER INFORMATION

BCS25-V25E1-03-LF

SERIES

LEADFREE

03 WAY

EAR

HIGH 2.55mm

180°SMT

DESCRIPTION: BATTERY CONN. 3pins Pitch=2.50mm