

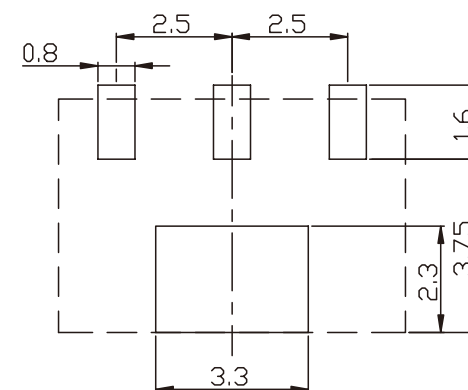
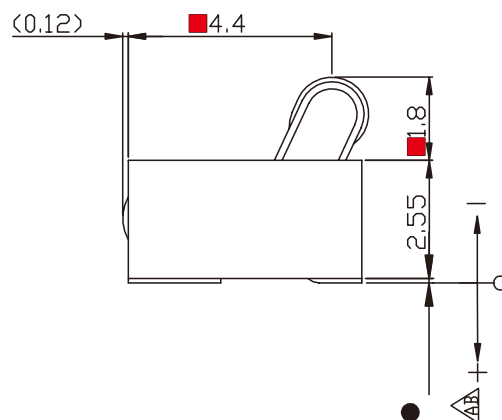
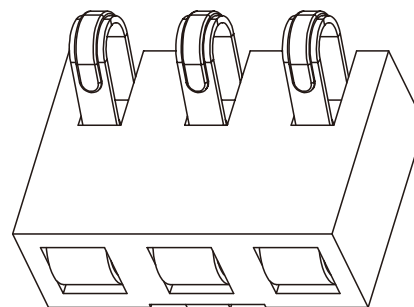
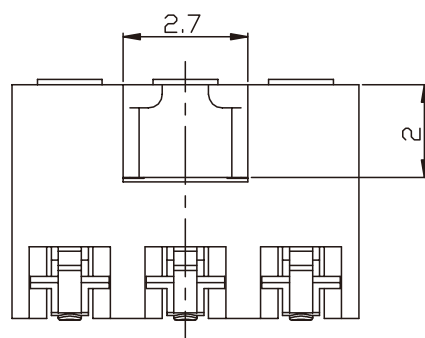


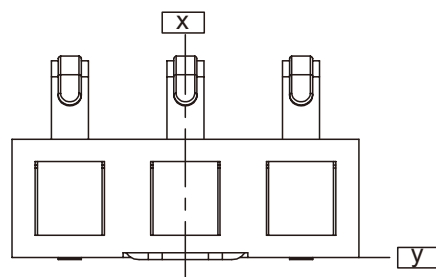

- ◆ Assembly dim.
- Functionally dim.
- Control dim.

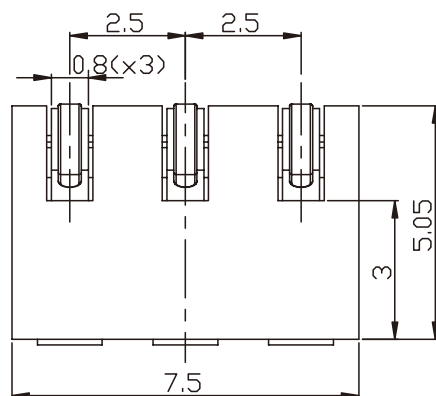

RECOMMENDED PCB LAYOUT

Notes:

1. Material & Plating : Housing LCP.
 - 1-1. Housing : LCP, Black.
 - 1-2. Contact : copper alloy.
Ni 90u", Au 30u", Sn 150u".
 - 1-3. Solder Pin : copper alloy.
2. Coplanarity: 0.1mm.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.15
.XX ± 0.10
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION



BCS25-V25E1R-03-LF

SERIES
LEADFREE
03 WAY
REEL
EAR
HIGH 2.55mm
180°SMT

DESCRIPTION: BATTERY CONN. 3pins Pitch=2.50mm




- ◆ Assembly dim.
- Functionally dim.
- Control dim.

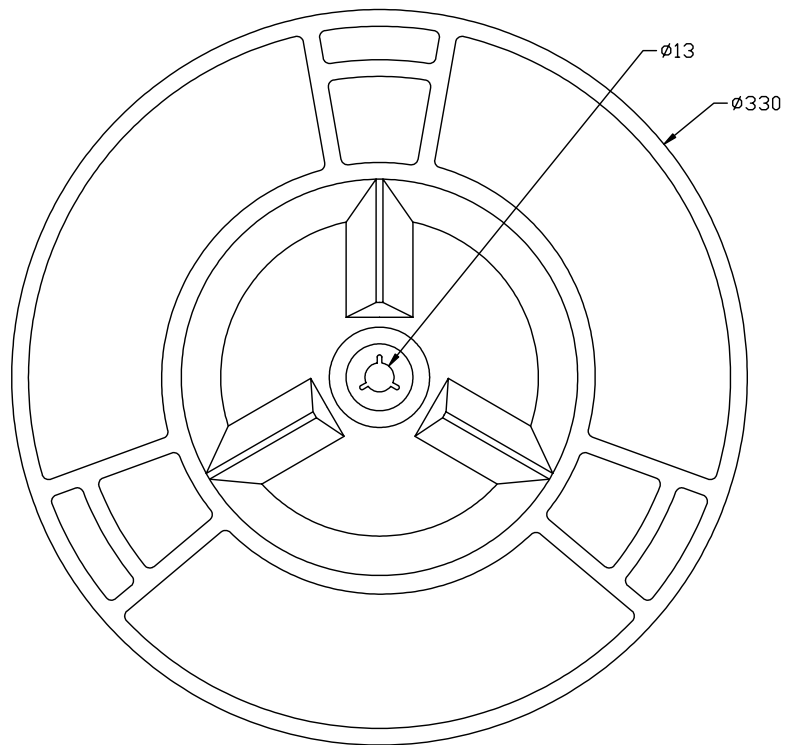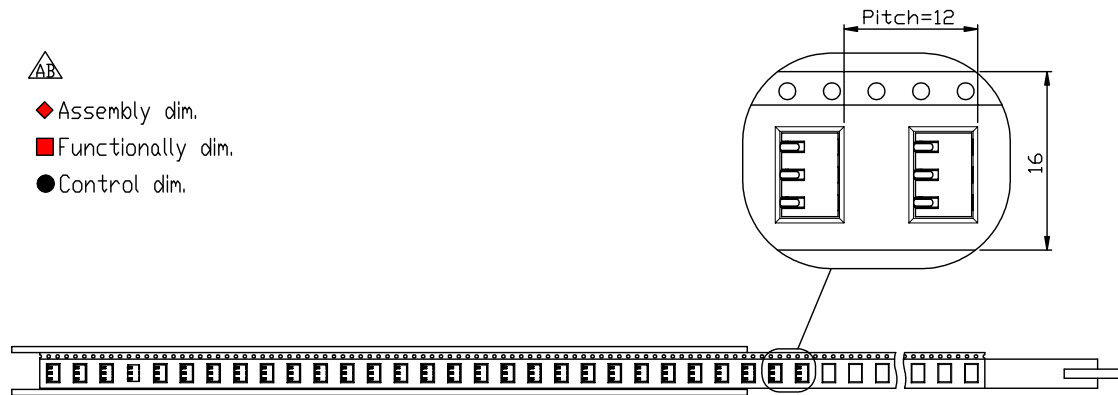


Notes:

- 3. Packing prepare leaser and empty.

Detail as below



- 4. Force of tearing off top tape 15~80gf.

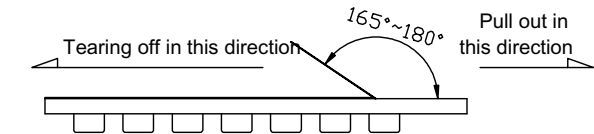

- 5. Edge of roofing up should be adhered.

The top cover tape to the side of reel an adhensive tape.

- 6. Top cover tape should be limited in area of plastic tape.

- 7. Quantity Plastic reel about 1200pcs.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BCS25-V25E1R-03-LF

SERIES

REEL

EAR

HIGH 2.55mm

180°SMT

LEADFREE

03 WAY

DESCRIPTION: PACKAGE for BATTERY CONN. 3pins