
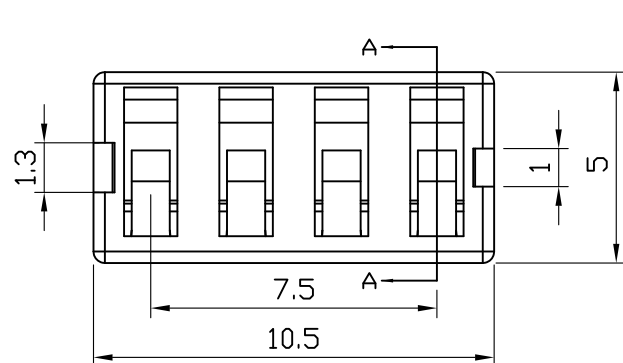
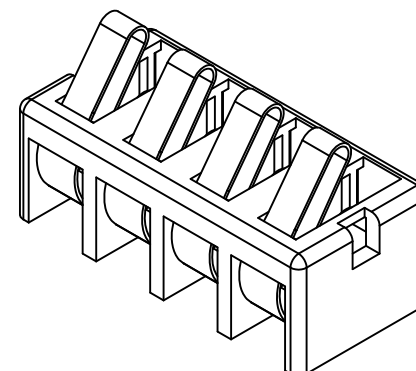
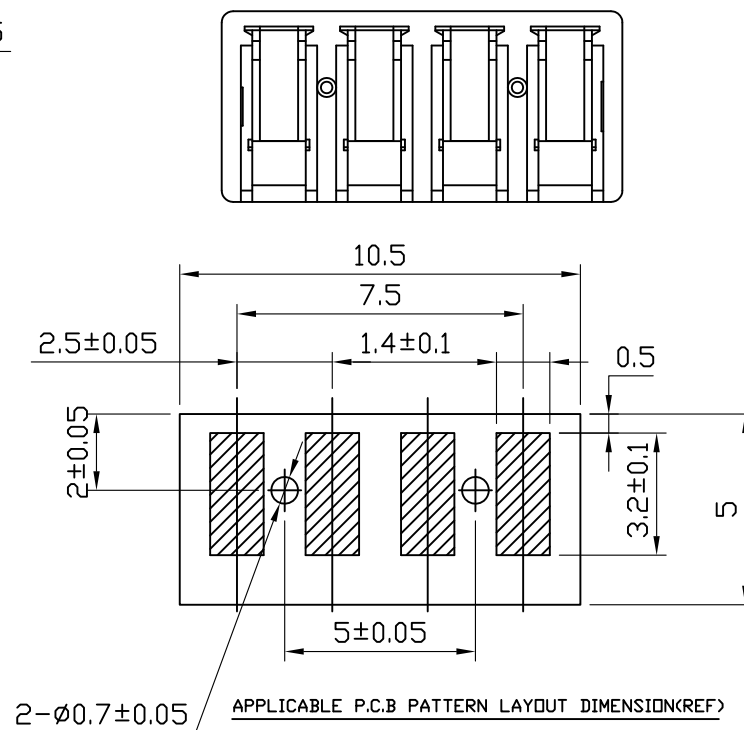
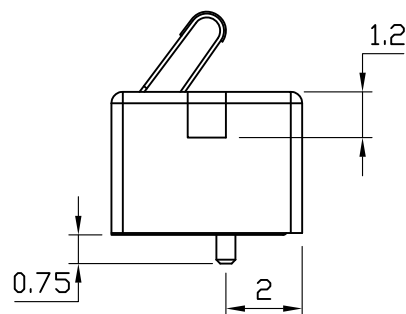


SECTION A-A

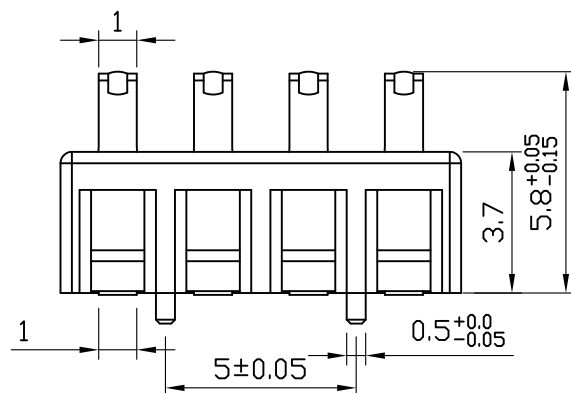

NOTES 2 :

機械性能

- 1.壽命測試：10000次
- 2.接觸彈力：大於100gf

電氣性能

- 1.接觸電阻：30mΩ MAX
- 2.絕緣阻抗：1000MΩ MIN min at 500V DC
- 3.抗電強度：250V AC/1 MINUTE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

BCS25-V37P1-04-LF

SERIES POST HIGH 3.7mm 180°SMT LEADFREE 04 WAY

DESCRIPTION: 2.5 PITCH 3.7H 4PIN BATTERY CONNECTOR