
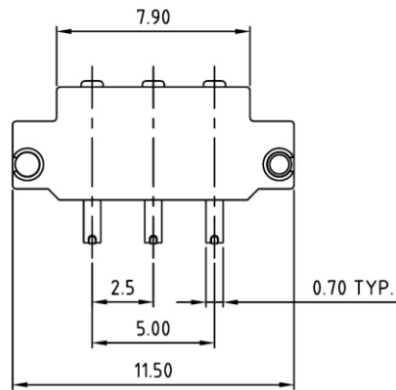
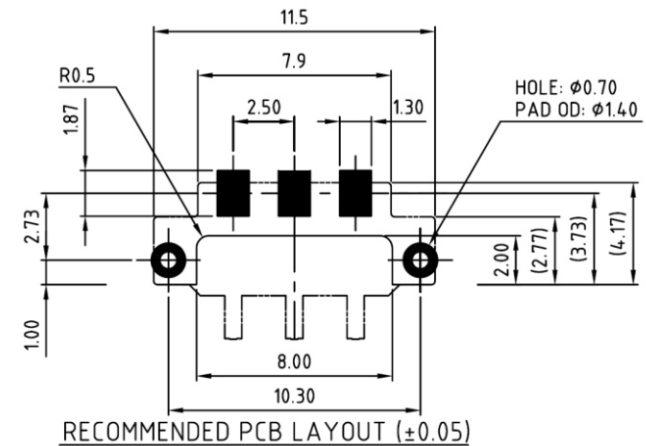


| ITEM | DESCRIPTION                                    | Q'TY |
|------|------------------------------------------------|------|
| 1    | HOUSING, BLACK, UL94 V-0                       | 1    |
| 2    | CONTACT, G/F ON TAIL, 5u" GOLD ON CONTACT AREA | 3    |
| 3    | MOUNTING POST, 100u" TIN OVER NICKEL           | 2    |

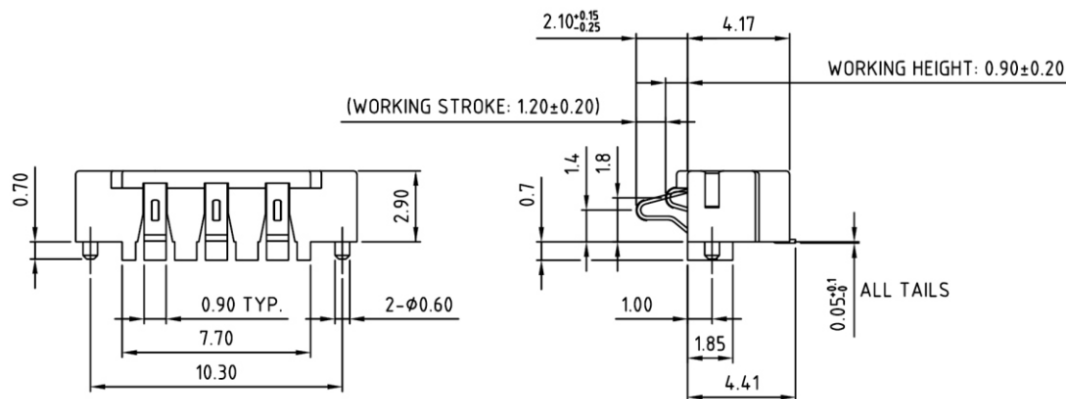

#### NOTES:

HOUSING: HIGH TEMP THERMOPLASTIC, UL94 V-0 RATED, BLACK

CONTACT: COPPER ALLOY

CONTACT FINISH: FLASH GOLD, ESPECIALLY 5u" GOLD ON CONTACT AREA

ALL OVER 30u" NICKEL UNDER-PLATED

MOUNTING POST: COPPER ALLOY, 100u" TIN OVER 50u" NICKEL UNDER-PLATED

CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM

INSULATION RESISTANCE: 1000 M OHMS MINIMUM

VOLTAGE RATING: 300 VAC

CURRENT RATING: 2.0 A

TAILS COPLANARITY (FOR SMT PROCESS): 0.12mm MAXIMUM

DURABILITY: 4000 CYCLES MINIMUM

CONTACT FORCE: 100 GRAMS MINIMUM AT SPECIFIED WORKING HEIGHT (0.90±0.20 FORM HSG).

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

**ORDER INFORMATION**

BCS25-W29P-03-LF

SERIES | | | LEADFREE  
| | | 03 WAY  
| | | POST  
| | | HIGH 2.9mm  
| | | 90°SMT

DESCRIPTION: