
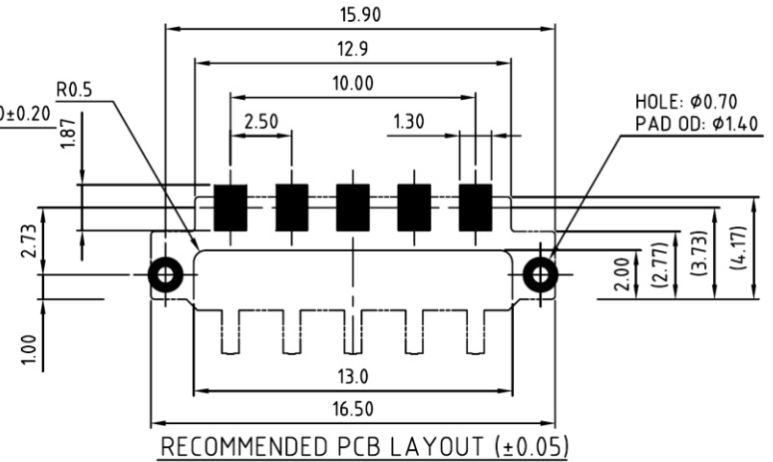
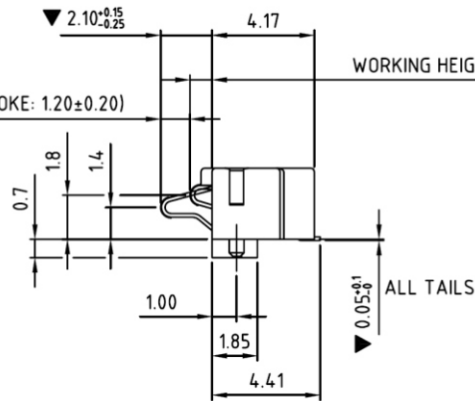


ITEM	PART NUMBER	DESCRIPTION	Q'TY
1	7801-0005-855	HOUSING, BLACK, UL94V-0	1
2	7801-0001-815	CONTACT, G/F ON TAIL, 5u" GOLD ON CONTACT AREA	5
3	7801-0002-800	MOUNTING POST, 100u" TIN OVER NICKEL	2

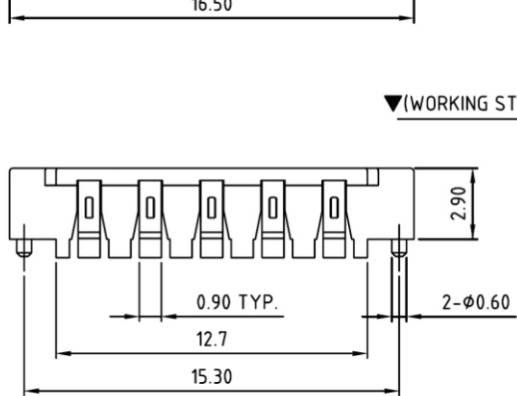

NOTES:

- HOUSING: HIGH TEMP THERMOPLASTIC , UL94 V-0 RATED, BLACK
- CONTACT: COPPER ALLOY
- CONTACT FINISH: FLASH GOLD, ESPECIALLY 5u" GOLD ON CONTACT AREA
ALL OVER 30u" NICKEL UNDER-PLATED
- MOUNTING POST: COPPER ALLOY, 100u" TIN OVER 50u" NICKEL UNDER-PLATED
- CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM
- INSULATION RESISTANCE: 1000 M OHMS MINIMUM
- VOLTAGE RATING: 300 VAC
- CURRENT RATING: 2.0 A
- TAILS COPLANARITY (FOR SMT PROCESS): 0.12mm MAXIMUM
- DURABILITY: 4000 CYCLES MINIMUM
- CONTACT FORCE: 100 GRAMS MINIMUM AT SPECIFIED WORKING HEIGHT (0.90±0.20 FORM HSG).

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

BCS25-W29P-05-LF
SERIES | LEADFREE
05 WAY
POST
HIGH 2.9mm
90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: