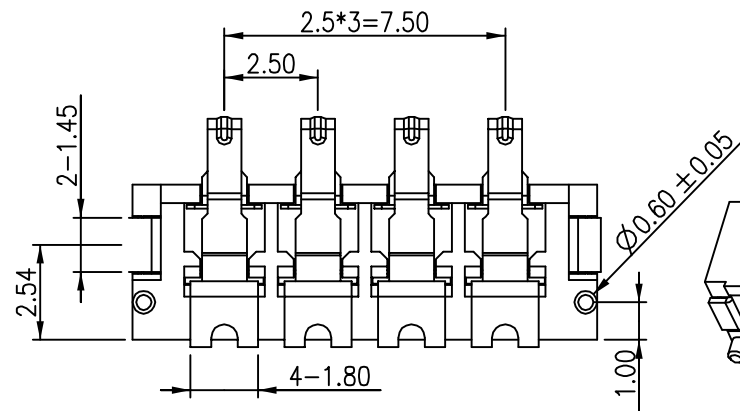
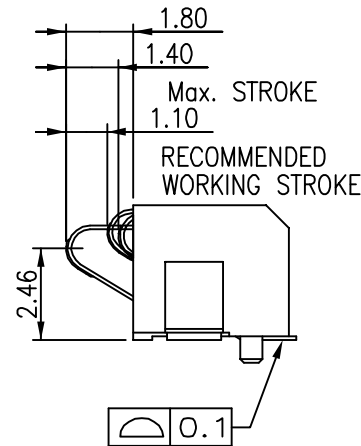
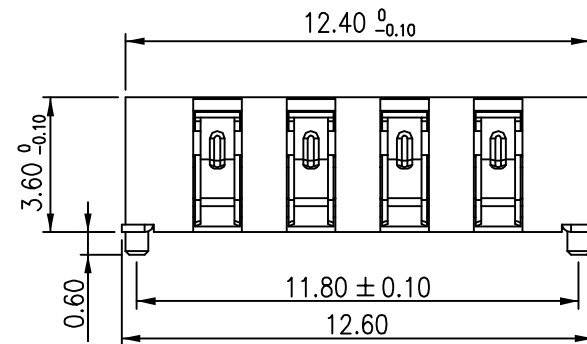
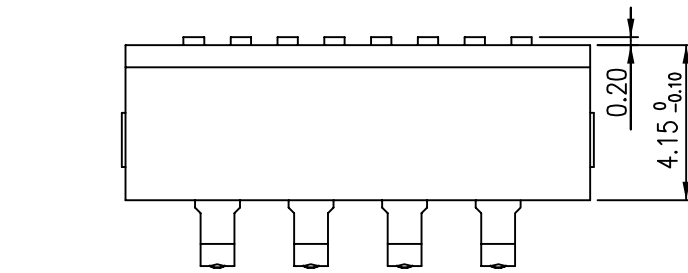


NOTE :

1.MATERIAL:

HOUSING:HIGH TEMP. THERMOPLASTIC,UL94V-0,COLOR BLACK

CONTACT:COPPER ALLOY,T=0.10

TAB:COPPER ALLOY,T=0.20

2.FINISH:

CONTACT:

GOLD PLATING ON CONTACT AREA(SEE NOTE 5);

>1u" GOLD PLATING ON SOLDER TAILS;


NICKEL UNDERPLATING OVER ALL.

TAB:

MATTE TIN OVER ALL

3.SOLDER HEAT RESISTANCE: REFLOW SOLDERING 260° FOR 5 SEC.

4.FOR REFLOW SOLDERING LEAD FREE PROCESS.

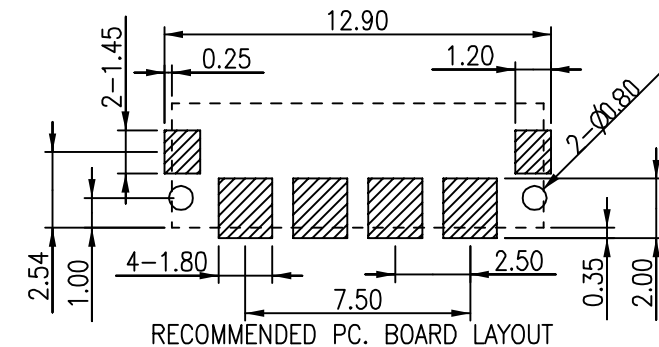

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

BCS25-W36EP2-04-LF

SERIES | POST | 04 WAY | LEADFREE
EAR
HIGH 3.60mm
90°SMT

DESCRIPTION: