

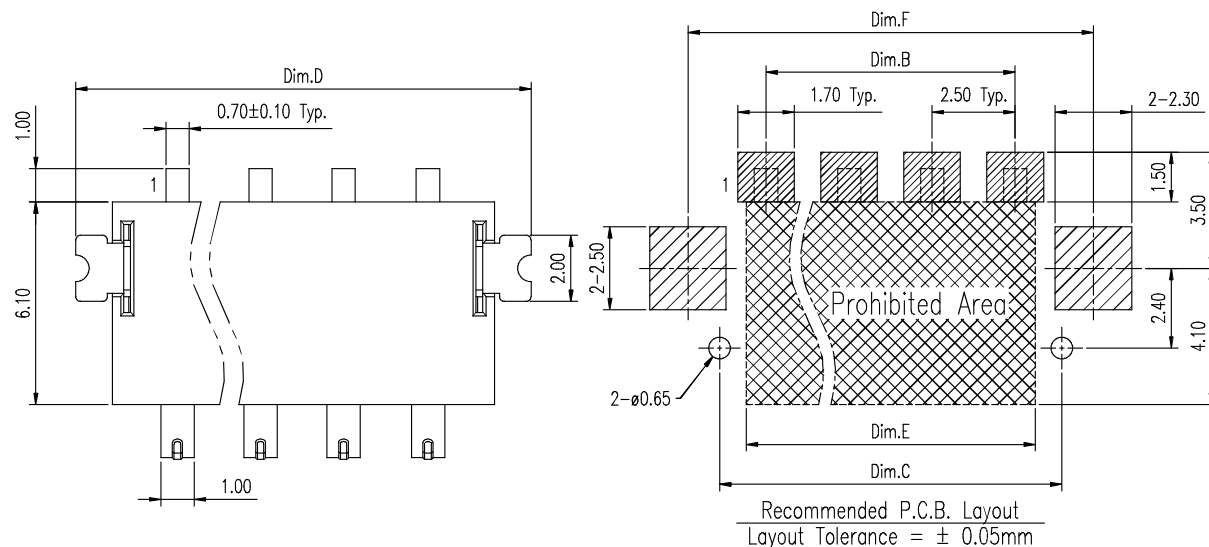


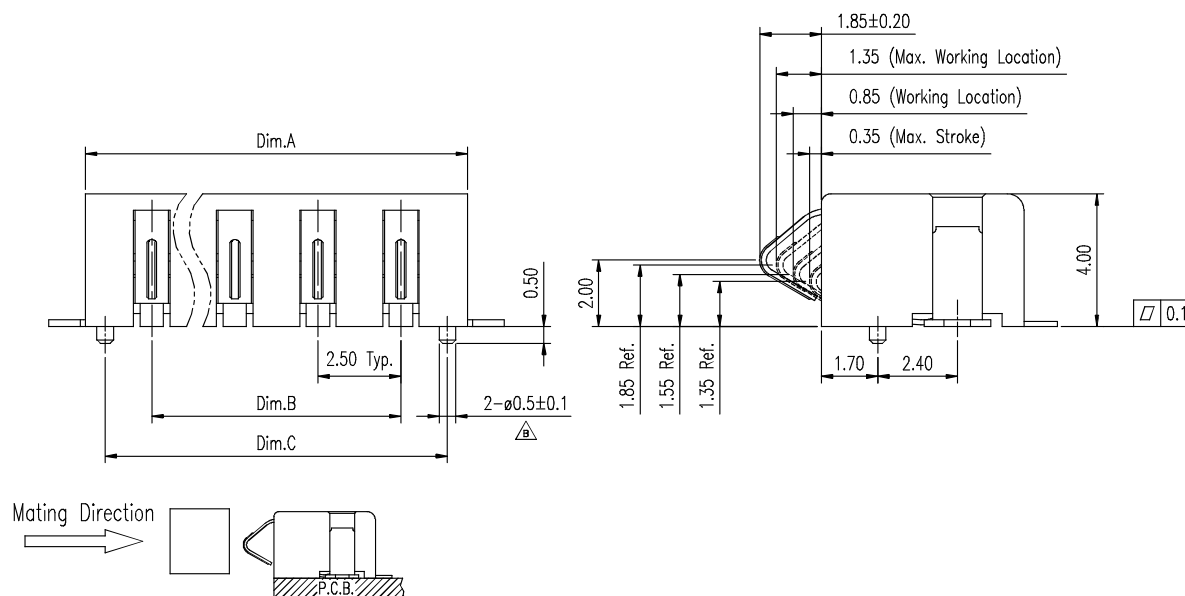


Notes:

1. Material:
Housing: Thermoplastic UL 94V-0, Black
Terminal: Copper Alloy
Latch: Copper Alloy
2. Finish:
Terminal: Selected Gold on Contact Area,
G/F on Solder Tails, Both over
Nickel Under-plated Overall
Latch: Tin over Nickel Under-plated Overall
3. Mechanical Characteristics:
Per Pin Force: 80g Ref. at Max. Working Location
200g Max. at Working Location
250g Ref. at Max. Stroke
Life Cycle: 5,000 Cycles
4. Part must be soldered on the P.C.B.



Mating Direction



Operation Method

Dimension Information:

Part No.	Dim.	Amount of Pins	Dim.A	Dim.B	Dim.C	Dim.D	Dim.E	Dim.F
BCS25-W40EP2-03		3	9.00	5.00	7.80	11.20	7.00	9.70
BCS25-W40EP2-04		4	11.50	7.50	10.30	13.70	9.50	12.20
BCS25-W40EP2-05		5	14.00	10.00	12.80	16.20	12.00	14.70
BCS25-W40EP2-06		6	16.50	12.50	15.30	18.70	14.50	17.20
BCS25-W40EP2-07		7	19.00	15.00	17.80	21.20	17.00	19.70
BCS25-W40EP2-08		8	21.50	17.50	20.30	23.70	19.50	22.20

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BCS25-W40EP2-xx-LF

SERIES
LEADFREE
03-08 WAY
POST
EAR
HIGH 4.0mm
90°SMT

DESCRIPTION: 2.5mm Pitch Spring Battery Conn.