


NOTE :

1.MATERIAL:
 HOUSING:HIGH TEMP. THERMOPLASTIC,UL94V-0,COLOR BLACK
 CONTACT:COPPER ALLOY,T=0.15
 TAB:COPPER ALLOY,T=0.15

2.FINISH:
 CONTACT:
 Au>1u" GOLD PLATING ON CONTACT AREA;
 GOLD FLASH PLATING ON SOLDER TAILS;
 NICKEL UNDERPLATING OVER ALL.
 TAB:
 MATTE TIN OVER ALL

3.SOLDER HEAT RESISTANCE: REFLOW SOLDERING 260° FOR 5 SEC.
 4.FOR REFLOW SOLDERING LEAD FREE PROCESS.

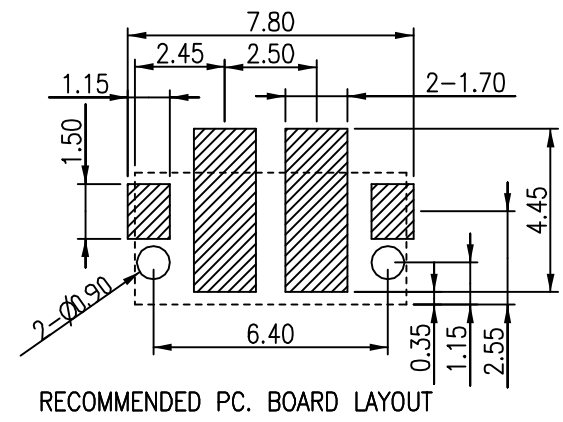

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

X. ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.05
 ANG ± 1°

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

ORDER INFORMATION

BCS25-W57EP2-02-LF

SERIES POST 02 WAY LEADFREE
 EAR HIGH 5.75mm
 90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: