



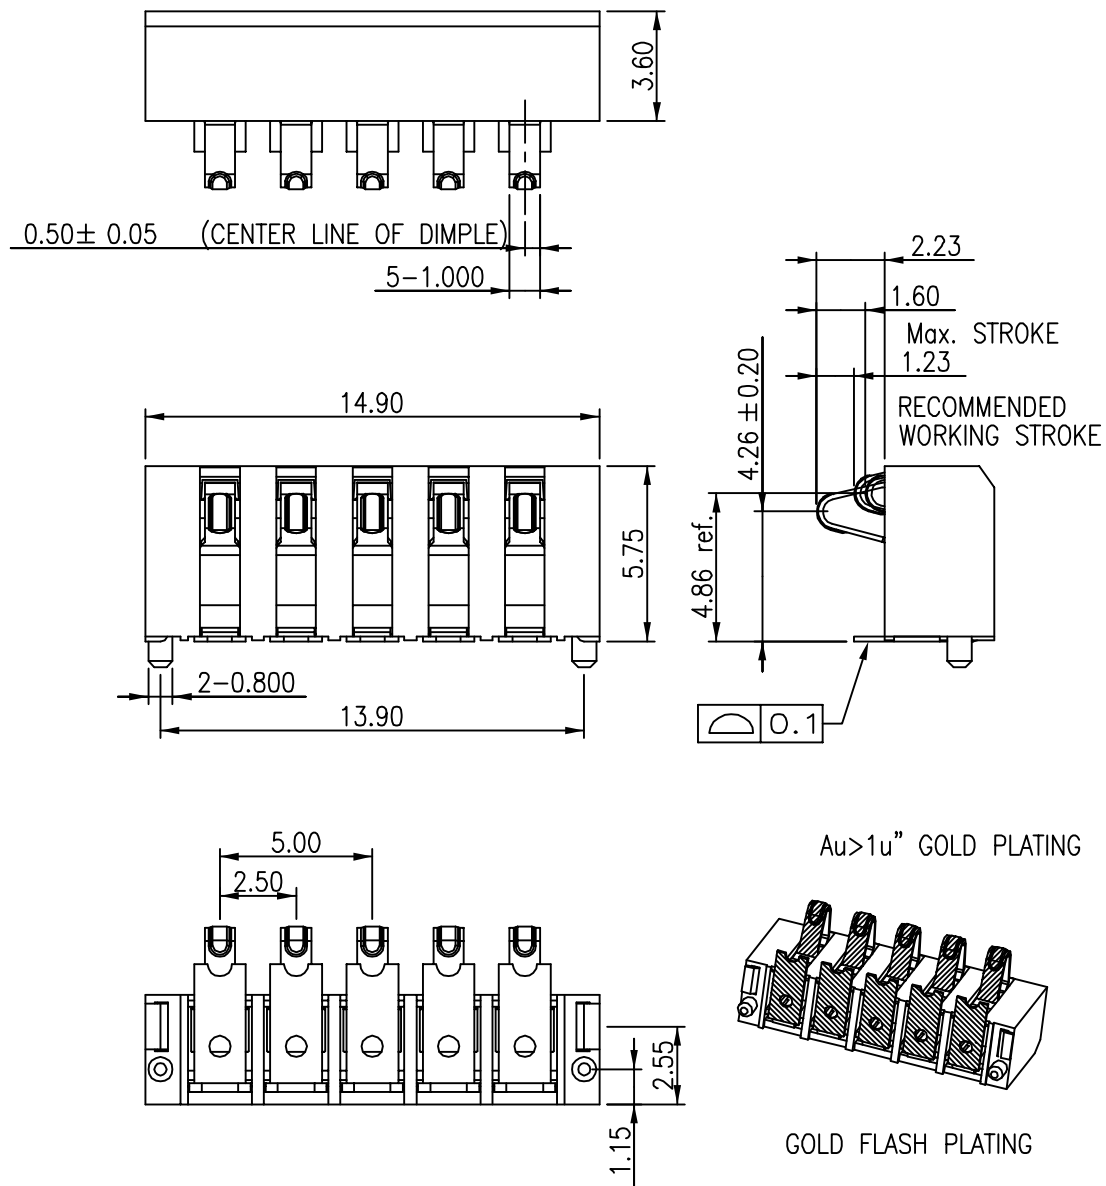

- NOTE :
- 1.MATERIAL:
HOUSING:HIGH TEMP. THERMOPLASTIC,UL94V-0,COLOR BLACK
CONTACT:COPPER ALLOY,T=0.15
TAB:COPPER ALLOY,T=0.15
 - 2.FINISH:
CONTACT:
Au>1u" GOLD PLATING ON CONTACT AREA;
GOLD FLASH PLATING ON SOLDER TAILS;
NICKEL UNDERPLATING OVER ALL.
TAB:
MATTE TIN OVER ALL
 - 3.SOLDER HEAT RESISTANCE: REFLOW SOLDERING 260° FOR 5 SEC.
 - 4.FOR REFLOW SOLDERING LEAD FREE PROCESS.

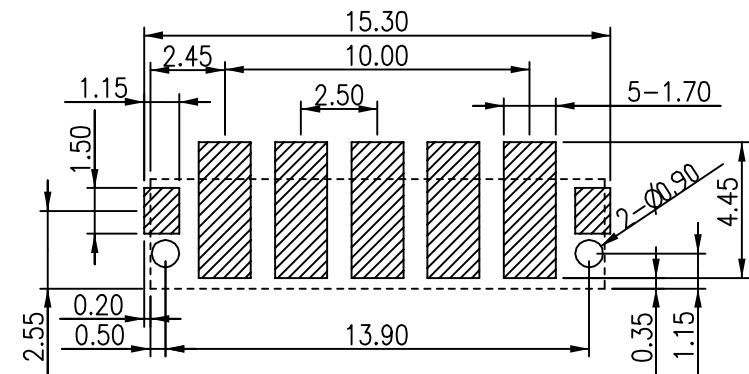

RECOMMENDED PC. BOARD LAYOUT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

BCS25-W57EP2-05-LF

SERIES

LEADFREE

05 WAY

POST

EAR

HIGH 5.75mm

90°SMT

DESCRIPTION: