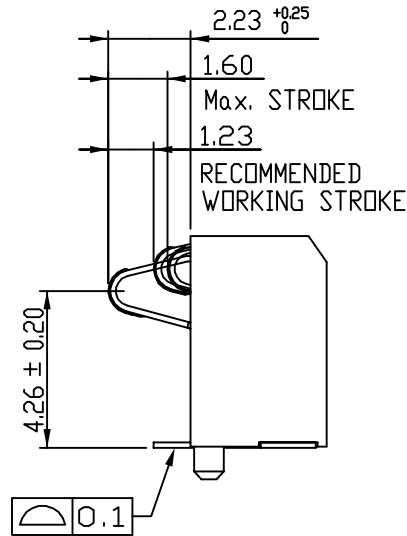
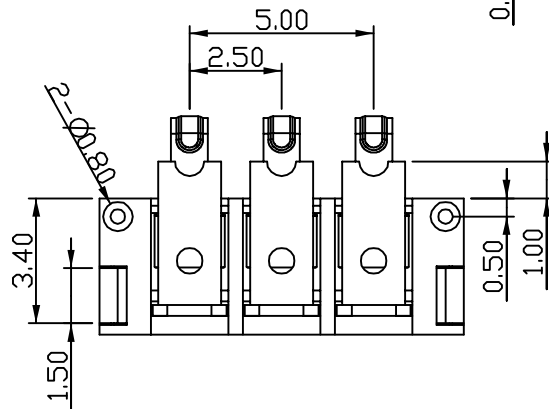
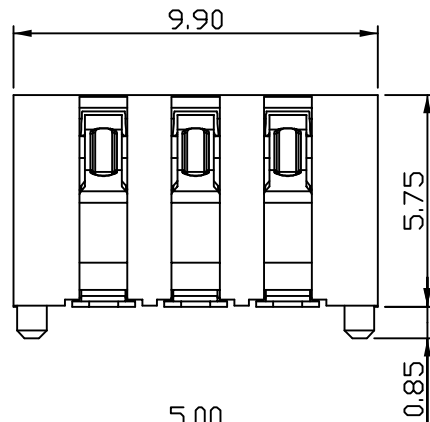
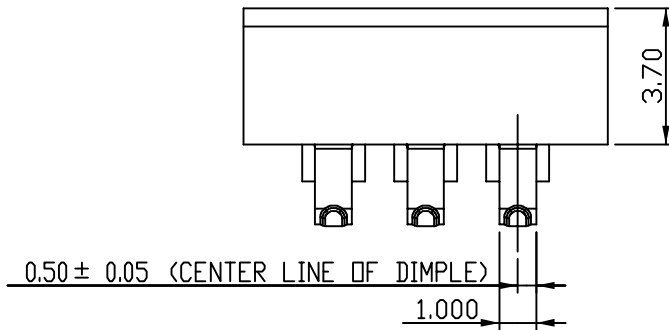


NOTE :

1.MATERIAL:

HOUSING:HIGH TEMP. THERMOPLASTIC,UL94V-0,COLOR BLACK

CONTACT: COPPER ALLOY,T=0.15

TAB: COPPER ALLOY,T=0.15

2.FINISH:

CONTACT:

>1u" GOLD PLATING ON CONTACT AREA;

GOLD FLASH PLATING ON SOLDER TAILS;

NICKEL UNDERPLATING OVER ALL.

TAB:


MATTE TIN OVER ALL

3.SOLDER HEAT RESISTANCE: REFLOW SOLDERING 260° FOR 5 SEC.

4.FOR REFLOW SOLDERING LEAD FREE PROCESS.

5.COMPRESSION FORCE :

NORM COMPRESSION 1.23mm FORCE : 176~210gf ±15%

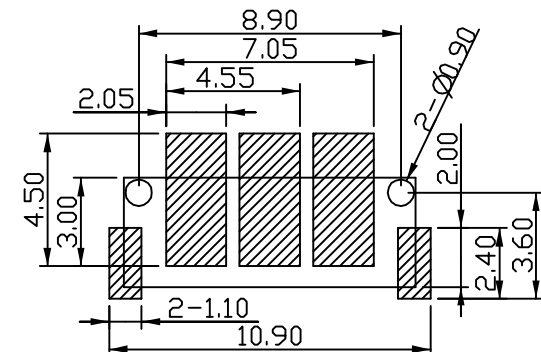

RECOMMENDED PC BOARD LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

BCS25-W57PE2-03-LF

SERIES

LEADFREE

03 WAY

EAR

POST

HIGH 5.75mm

90°SMT

DESCRIPTION: