
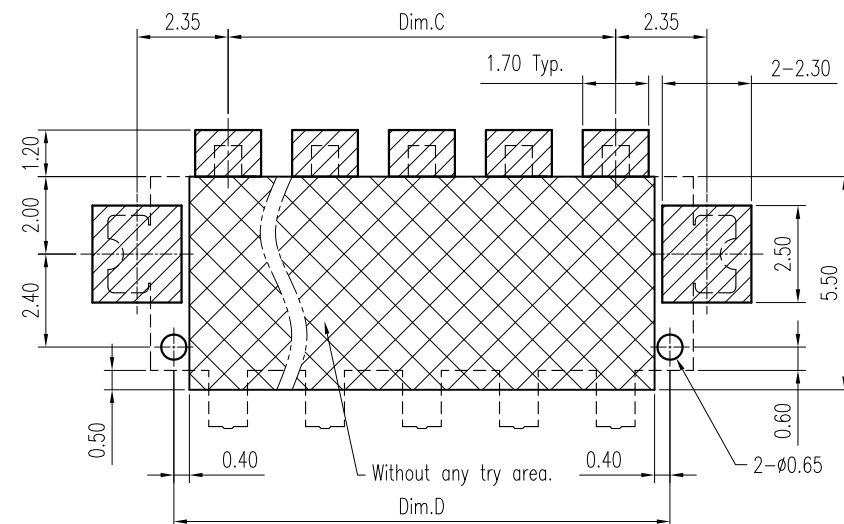
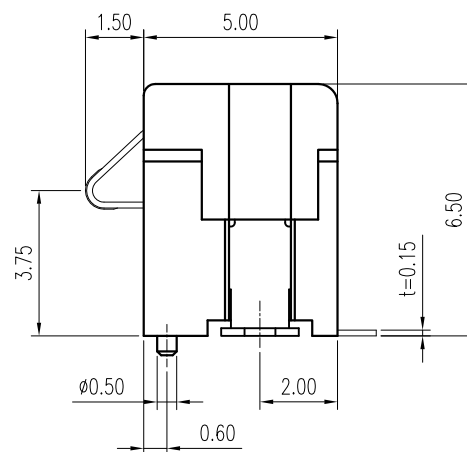
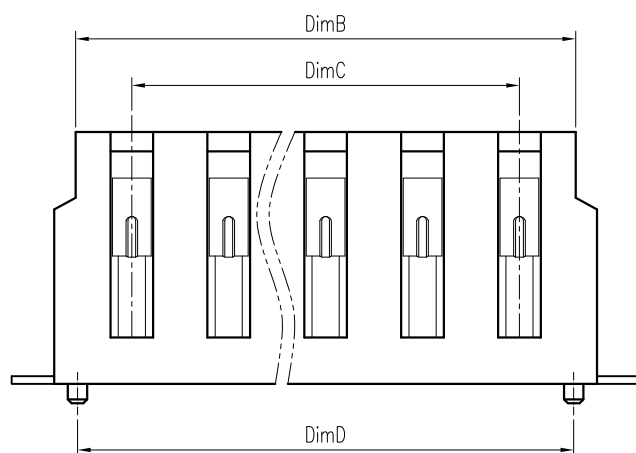


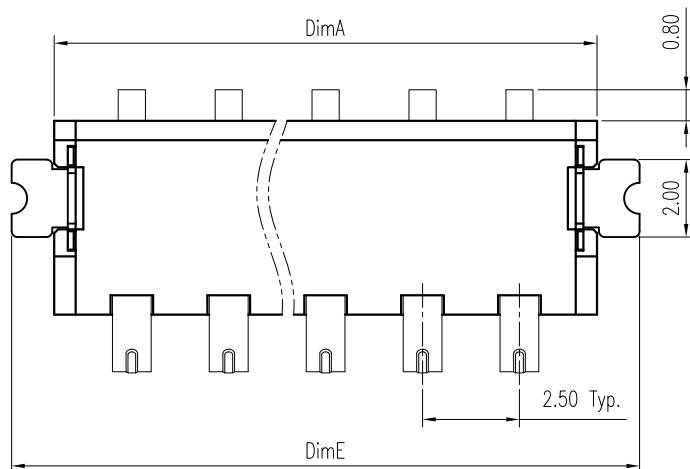

Recommended P.C.B. Layout
Layout Tolerance = $\pm 0.05\text{mm}$

Notes:

- Material:
Housing: Thermoplastic UL 94V-0, Black
Terminal: Copper Alloy
Latch: Copper Alloy
- Finish:
Terminal: Selected Gold on Contact Area,
G/F on Solder Tails, Both over
50u" Min. Nickel Under-plated Overall
Latch: Tin Plating overall 50u" Min. ,
Nickel 50u" Min. Under-plated Overall.

Dimension Information:

Part No.	Dim. Amount of Pins	Dim.A	Dim.B	Dim.C	Dim.D	Dim.E
BCS25-W65EP2-03	3	9.00	7.90	5.00	7.80	11.20
BCS25-W65EP2-04	4	11.50	10.40	7.50	10.30	13.70
BCS25-W65EP2-05	5	14.00	12.90	10.00	12.80	16.20
BCS25-W65EP2-06	6	16.50	15.40	12.50	15.30	18.70
BCS25-W65EP2-07	7	19.00	17.90	15.00	17.80	21.20
BCS25-W65EP2-08	8	21.50	20.40	17.50	20.30	23.70

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X ± 0.30
.XX ± 0.20
.XXX ± 0.15
ANG $\pm$



ORDER INFORMATION

BCS25-W65EP2-xx-LF

SERIES | POST | EAR | HIGH 6.5mm | 90°SMT | LEADFREE | 03~08 WAY

DESCRIPTION: 2.5mm Pitch Battery Conn. Male Type