

RECOMMENDED PCB LAYOUT
TOP VIEW (.XX±0.05)

性能:

- 额定电流: 2.0A
- 额定电压: 12V
- 耐电压: 500V
- 接触电阻: 30mΩ
- 绝缘电阻: 500MΩ
- 工作温度: -40℃~+85℃
- 塑件(材质): LCP
- 接触点(材质): 磷铜, 镀金

PART NO.	A	B	C
BCS25-W54EP2-03	5.4	3.8	4.6
BCS25-W60EP2-03	6.0	4.4	5.2
BCS25-W65EP2-03	6.5	4.9	5.7
BCS25-W70EP2-03	7.0	5.4	6.2
BCS25-W75EP2-03	7.5	5.9	6.7
BCS25-W80EP2-03	8.0	6.4	7.2

RoHS Compliant

TOLERANCES ARE



DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4


- X, ±
- .X ± 0.30
- .XX ± 0.20
- .XXX ± 0.10
- ANG ±

P PROJECTION

照片框

ORDER INFORMATION

BCS25-WxxEP2-03-LF

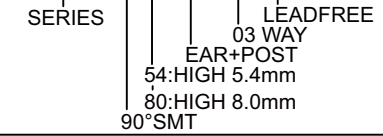

DESCRIPTION: 彈片式 2.5PH 3PIN SMT 帶定位柱 鍍金卷裝

煜倫股份有限公司

www.morethanall.com