





P.C.B. LAYOUT

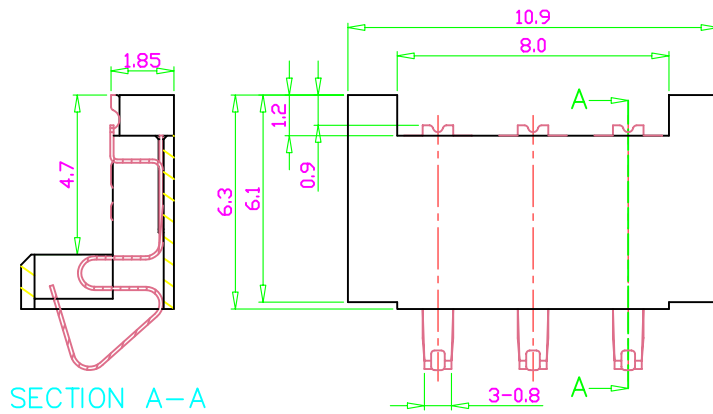

SECTION A-A

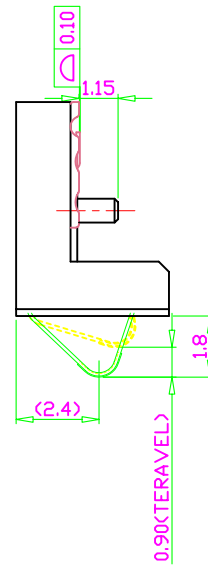

1.MATERIAL
 THIS PART DON'T CONTAIN ANY SUBSTANCES WHICH ARE SPECIFIED IN SS-00259
 INSULATOR: GLASS FILLED THERMO-PLASTIC. UL 94V-0
 TEMINAL: YUCT-M EH
 2.SPECIFICATION
 CURRENT RATING: 0.5A 50V AC/DC
 CONTACT RESISTANCE: 60 m Ω MAX AT DC 20mA
 INSULATION RESISTANCE: 100 M Ω MIN AT 500V DC
 OPERATING TEMPERATURE RANGE: -25°C TO +85°C

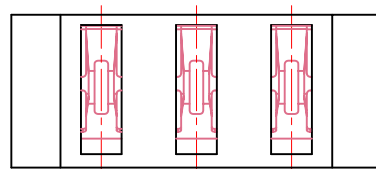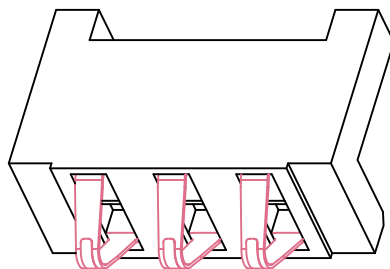

BCS28-W18P-03-LF
 LEADFREE

RoHS Compliant

MORETHANALL
 CONNECTORS
 ASSEMBLIES

煜倫股份有限公司

PART NO. BCS28-W18P-03

DWG NO. BCS28-W18P-03

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
 .XX ± 0.1
 .XXX ±
 AWG

DESCRIPTION:

BATTERY SOCKET
 2.80mm PITCH 03PIN BATTERY
 H=4.5mm SMT CONN.

AREA

REVISIONS

HK

DATE