
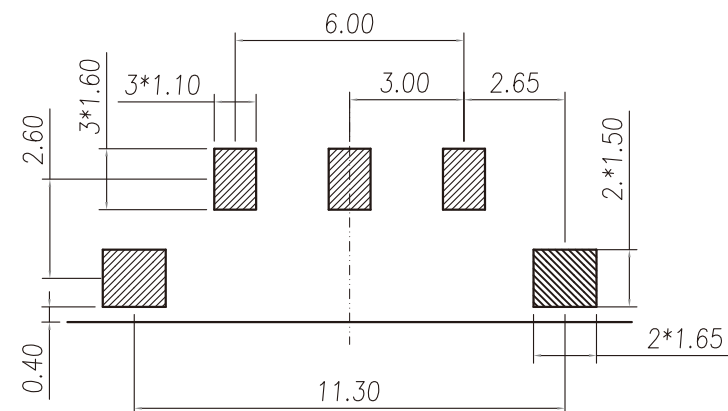
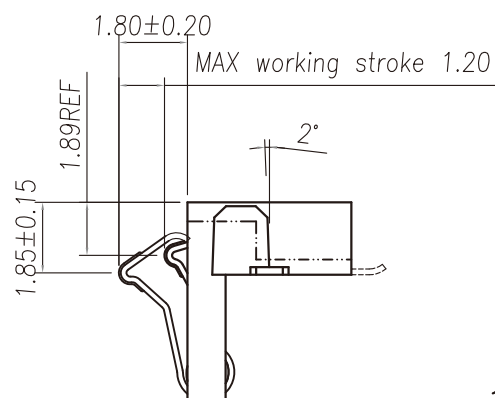
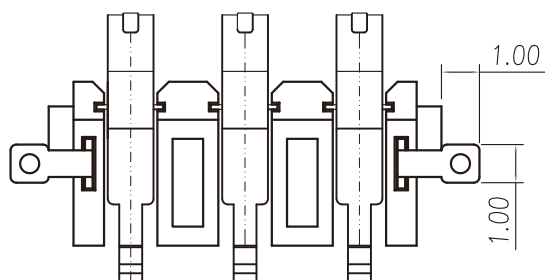


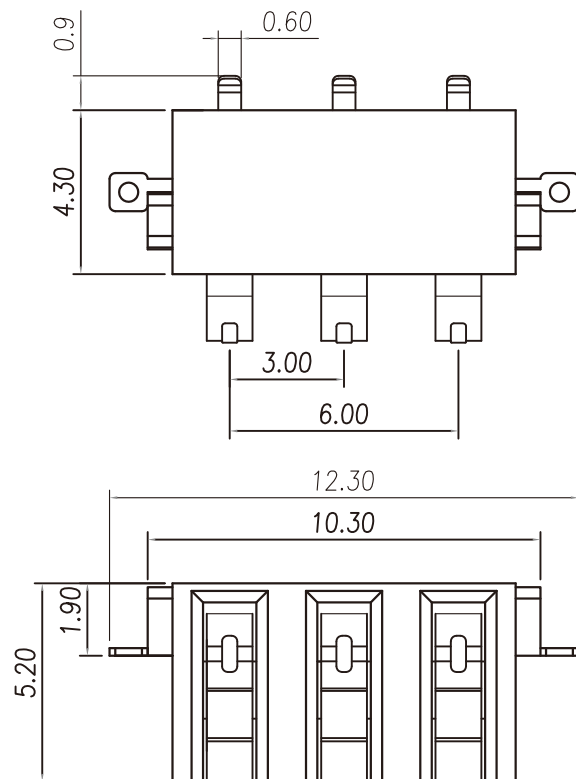

RECOMMENDED P.C.B LAYOUT

1. MATERIAL :
 - 1-1. HOUSING : LCP UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BERYLLIUM COPPER
 - 1-3. GROUND : PHOSPHOR BRONZE
2. FINISH :
 - 2-1. CONTACT AREA : 30 MICRO INCHES MIN. GOLD PLATED
 - UNDER PLATE : NICKEL
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 1.5A
 - 3-2. Voltage :125V
4. Environmental :
 - 4-1. Operation Temperature : -40℃~105℃

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

BCS30-W19E1-03-LF

SERIES | | LEADFREE
| | 03 WAY
| | EAR
| | HIGH 1.9mm
| | 90°SMT

DESCRIPTION: Spring Battery 3P CONN