
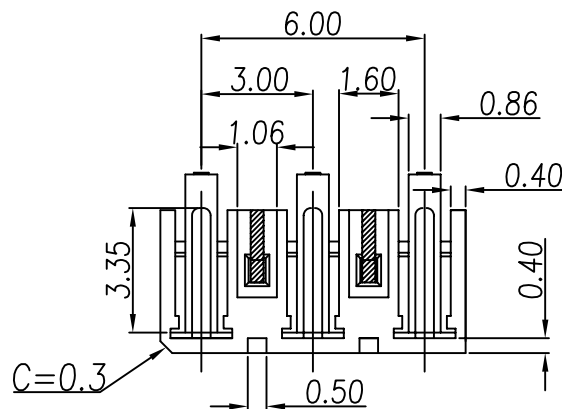
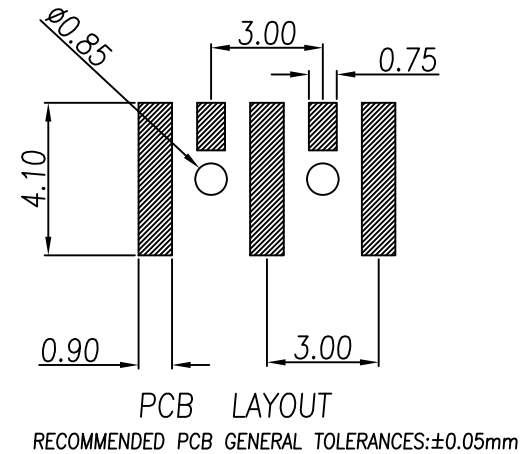
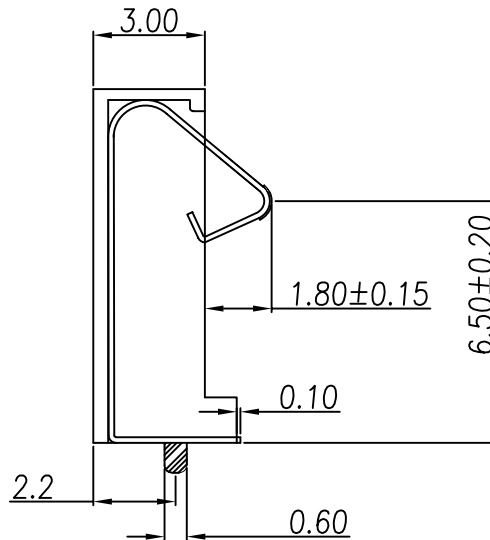


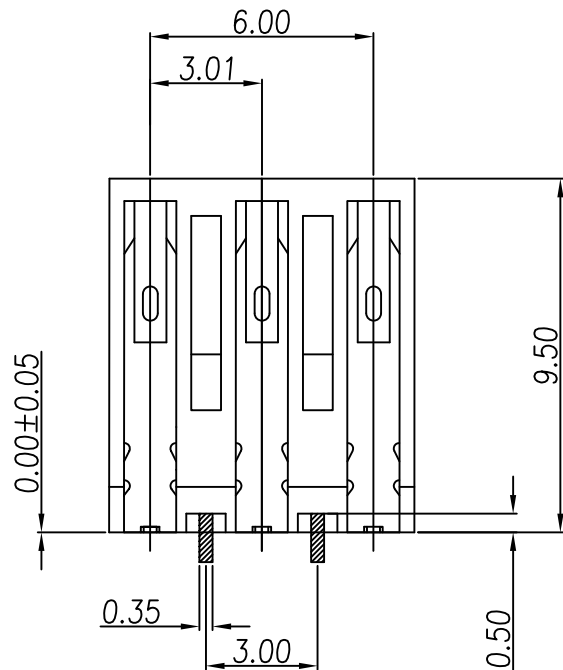

#### NOTE:

#### SPECIFICATIONS:

##### 1.GENERAL REQUIREMENTS:

- 1-1 OPERATING TEMPERATURE RANGE: -40°C TO +85°C
- 1-2 STORAGE TEMPERATURE RANGE: -40°C TO +100°C
- 1-3 HUMIDITY RANGE: 10%RH TO 80%RH

##### 2.ELECTRICAL REQUIREMENTS:

- 2-1 RATED CURRENT(PER CONTACT): 1.5 AMPS CONTINUOUS
- 2-2 RATED VOLTAGE(PER CONTACT): 200 VAMS AT SEA LEVEA
- 2-3 INSULATION RESISTANCE(I.R): 8 MEGAOHMS Min.
- 2-4 CONTACT RESISTANCE(PER CONTACT) Max: 25 MILLIOHMS.

##### 3.MATERIAL:

- 3-1 CONTACT: BERYLLIUM BRONZE
- 3-2 HOUSING: LCP
- 3-3 PLATING: CONTACT GOLD 30u" REMNANT GOLD FLASH/TIN 50u"

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION

照片框

#### ORDER INFORMATION

BCS30-W95EP2-03-LF

SERIES

LEADFREE

03 WAY

EAR+POST

HIGH 9.5mm

90°SMT

DESCRIPTION: 3P電池座—4