


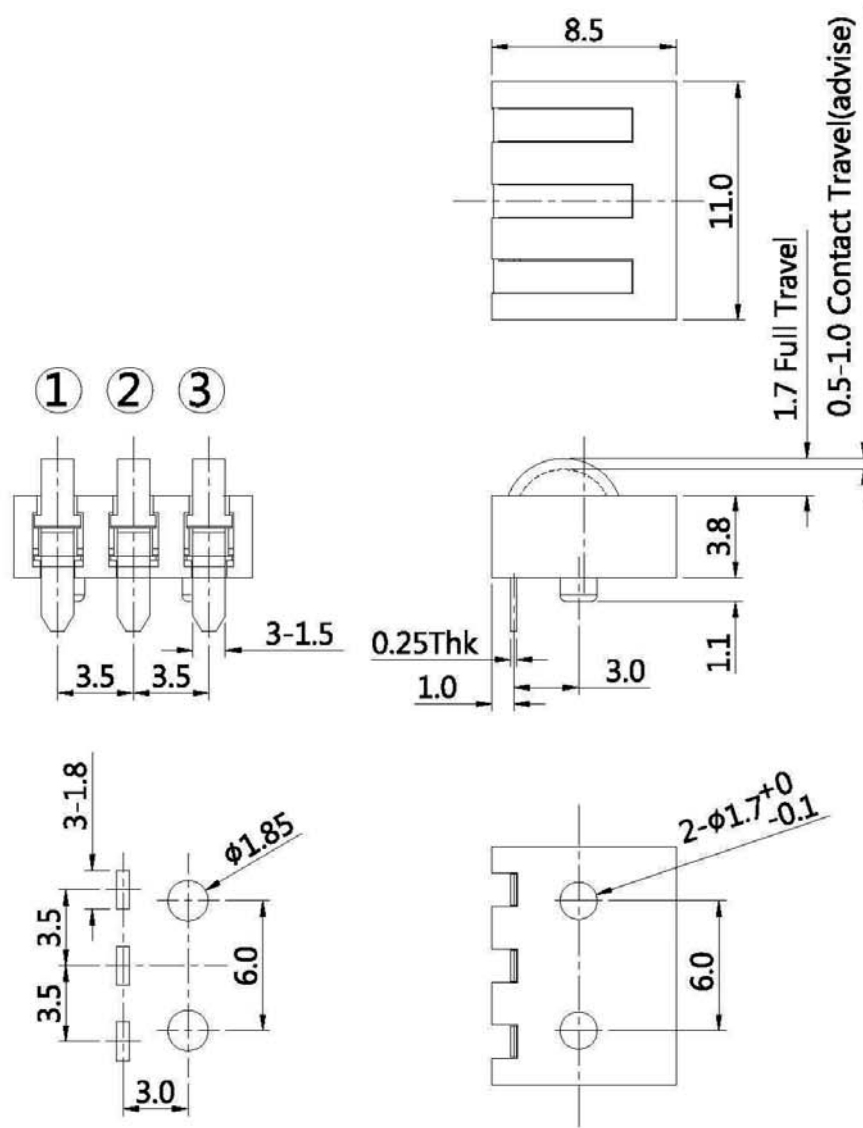

P.C.B LAYOUT

SPECIFICATION

Current Rating: 2A DC 12V



Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Dielectric Voltage: 500V AC for one minute

Force: 0.6mm, Contact Travel 600fg Max.

Life Test: 20,000 Cycles

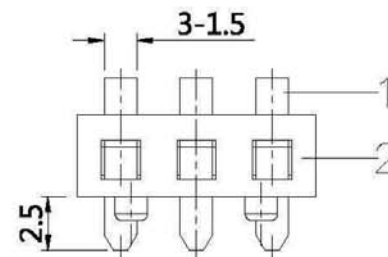

CIRCUIT

No.	Name	Material	Q'ty	Finish
1	Contact Terminal	Beryllium Copper	3	Gold Plated
2	Housing	PPA	1	Black

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.38

UNIT / mm

SCALE 1 : 1

.XX ± 0.10

DATE

.XXX ± 0.05

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

BCS35-D38P1-03-LF

SERIES

LEADFREE

03 WAY

POST

HIGH 3.8mm

DIP 180°

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com