

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

Notes:

- Material :
Housing : Thermoplastic UL 94V-0, Black
Terminal : Copper Alloy
Forklock : Copper Alloy
- Finish :
Terminal : Selected Gold on Contact Area,
Gold Flash on Solder Tails, Both over
40u" Min. Ni Under-plated Overall
Forklock : Gold Flash Over 50u" Min. Ni Under-plated Overall.

Dimension Information:

Part No.	Dim.	Amount of Pins	Dim.A	Dim.B	Dim.C	Dim.D
BCT20-PR058Z-05		5	15.5	8	13	14.25
BCT20-PR058Z-06		6	17.5	10	15	16.25
BCT20-PR058Z-07		7	19.5	12	17	18.25
BCT20-PR058Z-08		8	21.5	14	19	20.25
BCT20-PR058Z-09		9	23.5	16	21	22.25

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com


DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1:1
DATE
SIZE A4 PPROJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

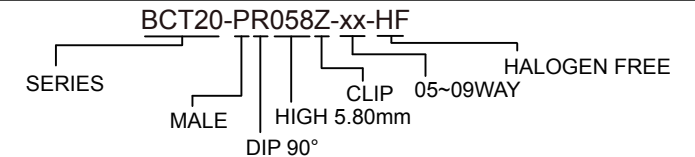

DESCRIPTION: 2.0mm Pitch Battery Conn. Male Type