

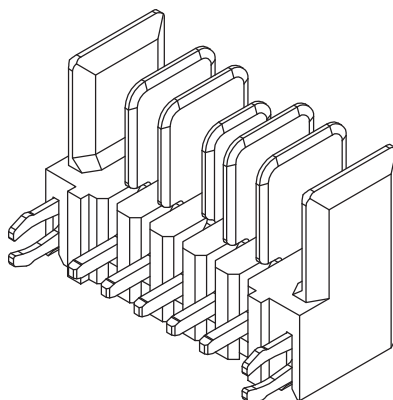
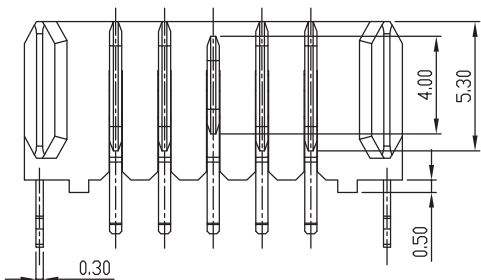
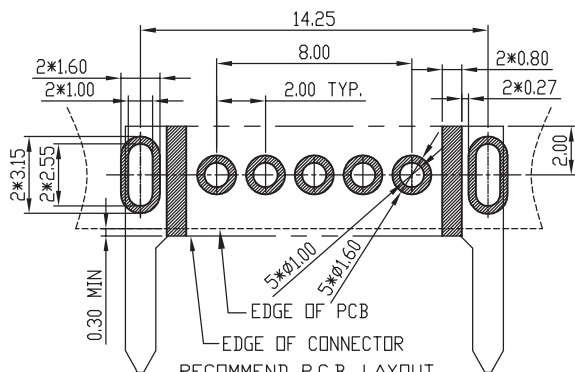


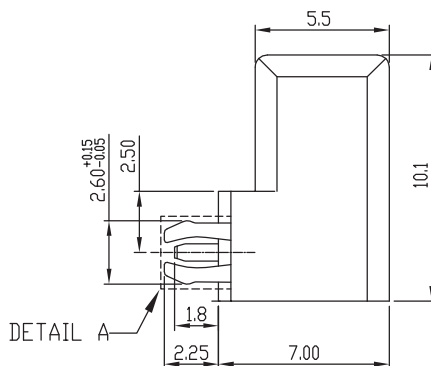


NOTES:

1. MATERIAL :
INSULATOR : LCP OR OTHER EQUIVALENT HIGH PERFORMANCE RESINS, UL94 V-0 RATED.
CONTACT : BRASS $T=0.50\pm0.02\text{mm}$.
CLIP : METAL OR OTHER EQUIVALENT PERFORMANCE ALLOY, $T=0.3\pm0.02\text{mm}$.
2. FINISH : GOLD PLATING IN THE CONTACT AREA, AND SELECTIVE PLATING IN THE SOLDER TAIL AREA, WITH 50u"(min.) NICKEL UNDERPLATING OVERALL.
3. THICKNESS= 1.20 ± 0.10

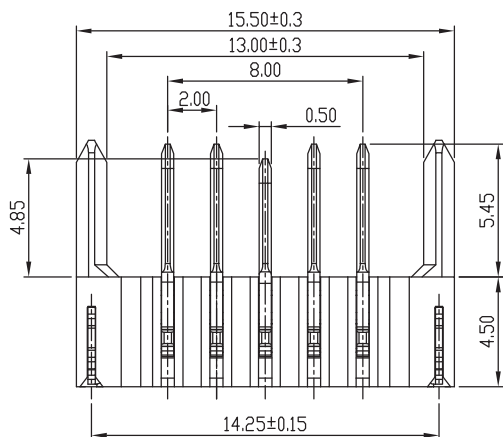

EDGE OF PCB
EDGE OF CONNECTOR
RECOMMEND P.C.B. LAYOUT
(COMPONENT SIDE)

(P.C.B. LAYOUT TOLERANCE : ± 0.05)

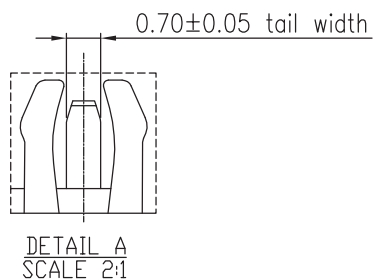

DETAIL A
SCALE 2:1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4


PPOJECTION

X, $\pm$
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG $\pm$

照片框

ORDER INFORMATION

BCT20-PR070Z-05-LF

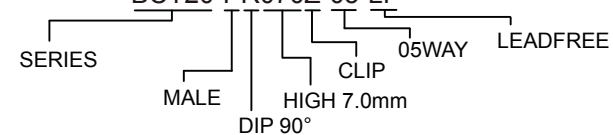

DESCRIPTION: BATTERY CONN MALE DIP, H=7.00MM