


Notes:

- 1. Material :
 Housing : Thermoplastic, UL 94V-0, Black
 Terminal : Copper Alloy
 Forklock : Copper Alloy
- 2. Finish :
 Terminal : Selected Gold on Contact Area,
 Gold Flash on Solder Tails,
 Both over 50u" Min. Ni Under-plated Overall
 Forklock : Gold Flash Over 50u" Min. Ni Under-plated Overall.
- 3. Recommended P.C.B. Thickness : 1.5 mm

BCT20-PR082Z-09-LF
 LEADFREE
 RoHS Compliant

Dimension Information:

Part No.	Dim.	Amount of Pins	Dim.A	Dim.B	Dim.C	Dim.D
BCT20-PR082Z-09		9	23.5	21.00	16.00	22.25

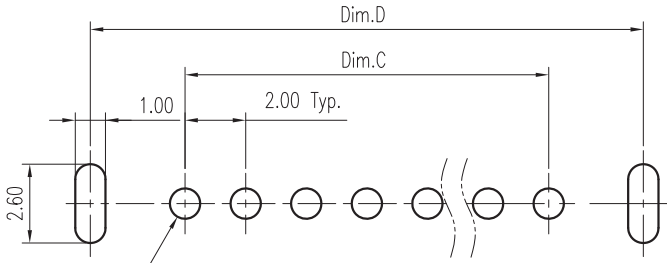

Recommended P.C.B. Layout
 Layout Tolerance = ± 0.05 mm



PART NO. BCT20-PR082Z-09

DWG NO. BCT20-PR082Z-09

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:


2.0mm Pitch Battery Conn.
 Male R/A Type

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE