
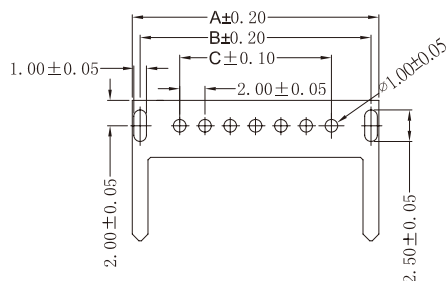



MATERIAL
INSULATOR: PA 9T OR OTHER EQUIVALENT HIGH PERFORMANCE RESINS, UL94-V0 RATED.
CONTACT: BRASS T=0.50mm.
CLIP: BRASST=0.30±0.01

FINISH: GOLD PLATING IN THE CONTACT AREA,AND WITH 50U"(min.) NICKEL UNDERPLATING OVERALL. SELECTIVE PLATING IN THE SOLDER TAIL AREA,

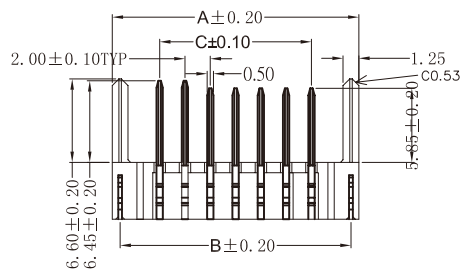

PCBBDARD LAYOUT

Part No.	A	B	C
05P	15.50	14.25	8.00
06P	17.50	16.25	10.00
07P	19.50	18.25	12.00
08P	21.50	20.25	14.00
09P	23.50	22.25	16.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BCT20-PR098Z-xx-LF

SERIES
CLIP
HIGH 9.8mm
DIP 90°
MALE
LEADFREE
05-09 WAY

DESCRIPTION: BATTERY CONN. MALE DIP, R/A