

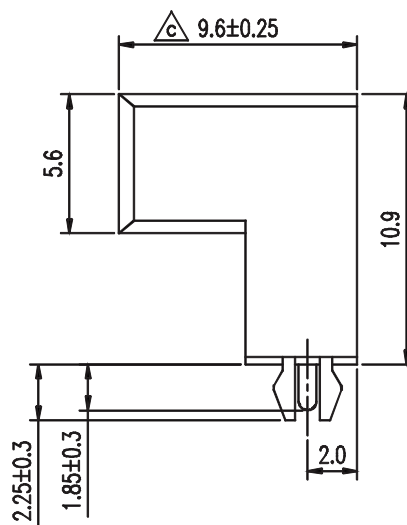


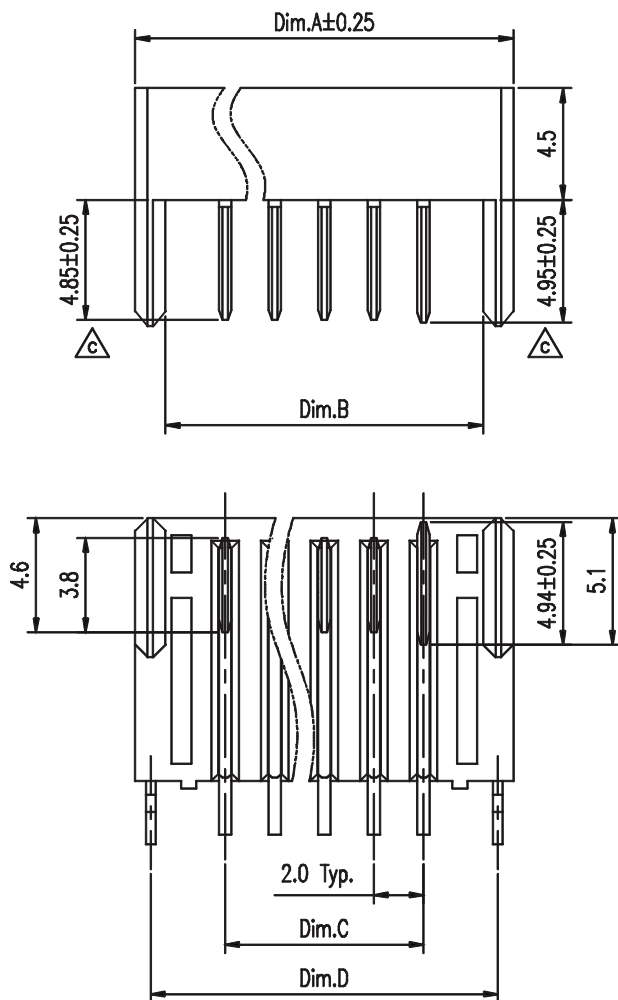

Notes:

- Material:
Housing: Thermoplastic UL 94V-0 , Black
Terminal: Copper Alloy
Forklock: Copper Alloy
- Finish:
Terminal: Selected Gold on Contact Area, G/F or 80u" Min. Tin on Solder Tails, Both over Nickel Under-plated Overall
Forklock: Gold Flash over Nickel Under-plated Overall.

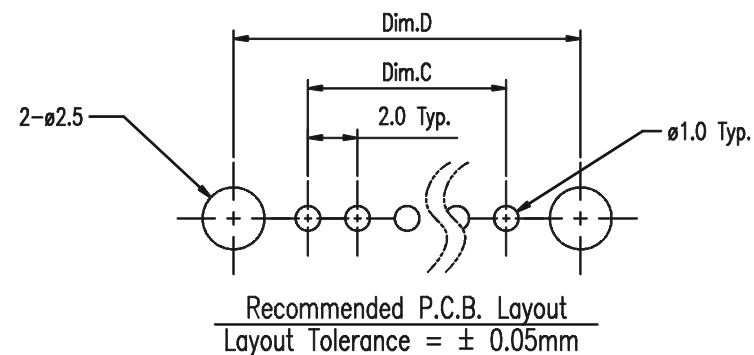

Part No.	Dim.	Dim.A	Dim.B	Dim.C	Dim.D
BCT20-PR109Z-05		15.25	12.8	8.0	14.0
BCT20-PR109Z-07		19.25	16.8	12.0	18.0

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4


TOLERANCES ARE

X, $\pm$
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG $\pm$

P PROJECTION

照片框

ORDER INFORMATION

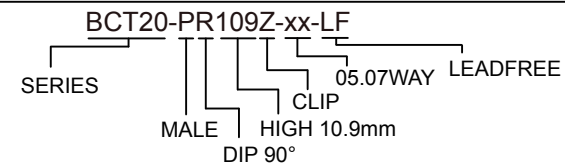

DESCRIPTION: 2.0 mm Pitch Battery Conn. Male R/A Type