
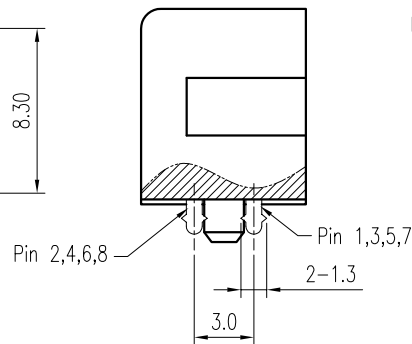


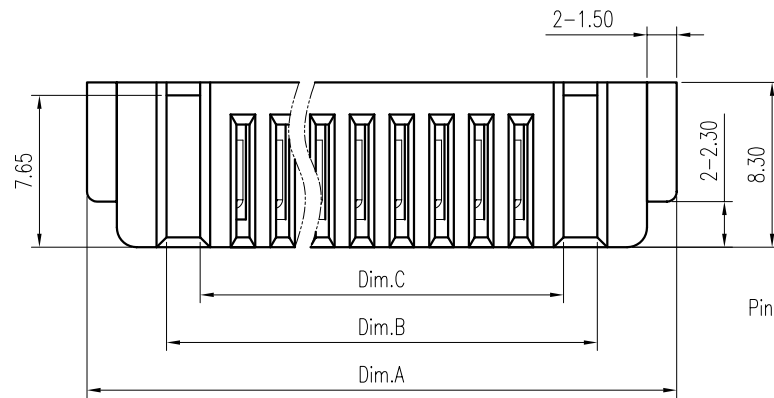




Section F-F

Notes:

1. Material :
Housing : Thermoplastic UL 94V-0, Black
Terminal : Copper Alloy
2. Finish :
Terminal : Selected Gold on Contact Area,
1u" Min. Gold on Solder Tails,
Both over 40u" Ni Under-plated Overall

Dimension Information:

Part No.	Dim.	Amount of Pins	Dim.A	Dim.B	Dim.C	Dim.D	Dim.E
BCT20-SD098P-04R		4	21.7	13.7	10.3	6.0	12.0
BCT20-SD098P-05R		5	23.7	15.7	12.3	8.0	14.0
BCT20-SD098P-06R		6	25.7	17.7	14.3	10.0	16.0
BCT20-SD098P-07R		7	27.7	19.7	16.3	12.0	18.0
BCT20-SD098P-08R		8	29.7	21.7	18.3	14.0	20.0
BCT20-SD098P-09R		9	31.7	23.7	20.3	16.0	22.0

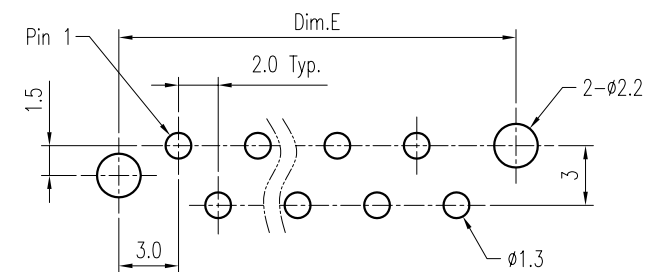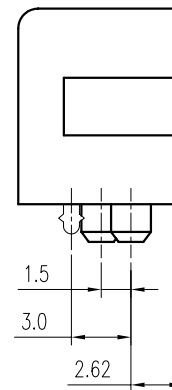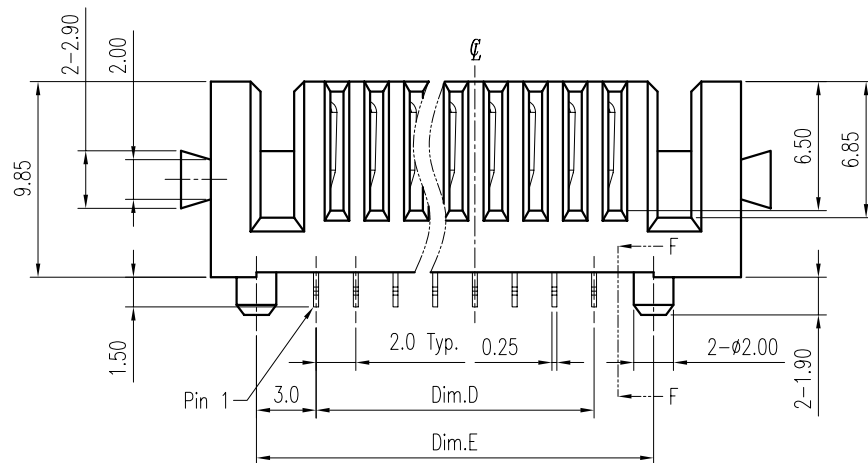

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

BCT20-SD098P-xxR-LF

SERIES

FEMALE

POST

DIP 180°

LEADFREE

R TYPE FOOT

04~09 WAY

HIGH 9.85mm

DESCRIPTION: 2.0mm Pitch Battery Conn. Female Type