

NOTE:  
 Material  
 Insulator: Nylon 9T(UL94V-0)  
 Contact: phosphor Bronze  
 Contact Plated: Gold over Nickel or Tin  
 Specification  
 Current rating: 7A  
 instant CURRENT: 10A  
 Contact Resistance: 30MΩ  
 Insulation Resistance: 100MΩ  
 Dielectric Voltage: 500V  
 Operdting Temperature: -40°~105°

| PIN | DIM.A | DIM.B | DIM.C | DIM.D |
|-----|-------|-------|-------|-------|
| 04  | 19.85 | 6.00  | 17.00 | 11.00 |
| 05  | 21.85 | 8.00  | 19.00 | 13.00 |
| 06  | 23.85 | 10.00 | 21.00 | 15.00 |
| 07  | 25.85 | 12.00 | 23.00 | 17.00 |
| 08  | 27.85 | 14.00 | 25.00 | 19.00 |
| 09  | 29.85 | 16.00 | 27.00 | 21.00 |
| 10  | 31.85 | 18.00 | 29.00 | 23.00 |
| 11  | 33.85 | 20.00 | 31.00 | 25.00 |
| 12  | 35.85 | 22.00 | 33.00 | 27.00 |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

X ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±


SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

BCT20-SR065P-xx-LF

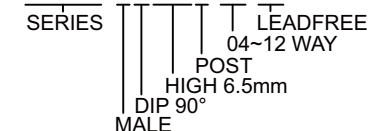

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: BATTERY FEMALE 2.0P 有柱