
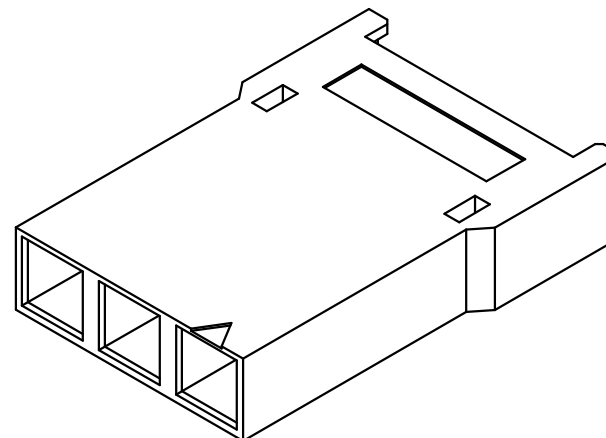


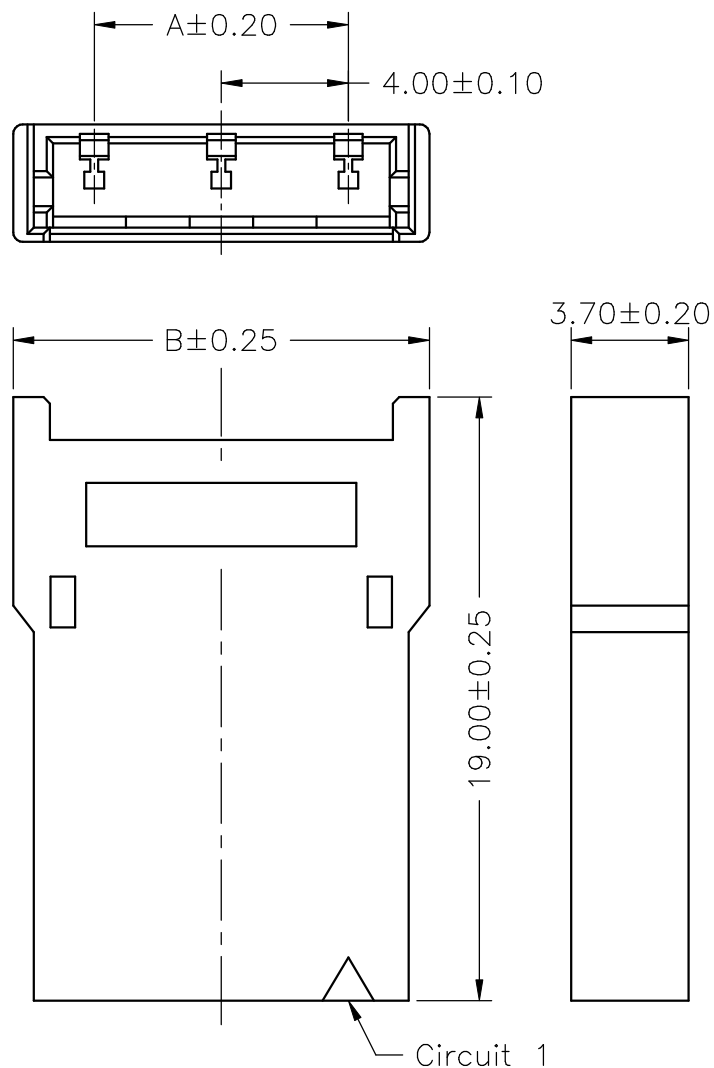

SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: 10m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 1800V AC/minute
 Material: Nylon66,UL94V-0
 Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
BH-P-02	4.00	9.10
BH-P-03	8.00	13.10
BH-P-04	12.00	17.10
BH-P-05	16.00	21.10

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
 .X $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$



ORDER INFORMATION

BH-P-xx-LF
 SERIES | LEADFREE
 02-05 WAY
 MALE HOUSING

DESCRIPTION: 4.00mm PITCH HOUSING-PLUG