
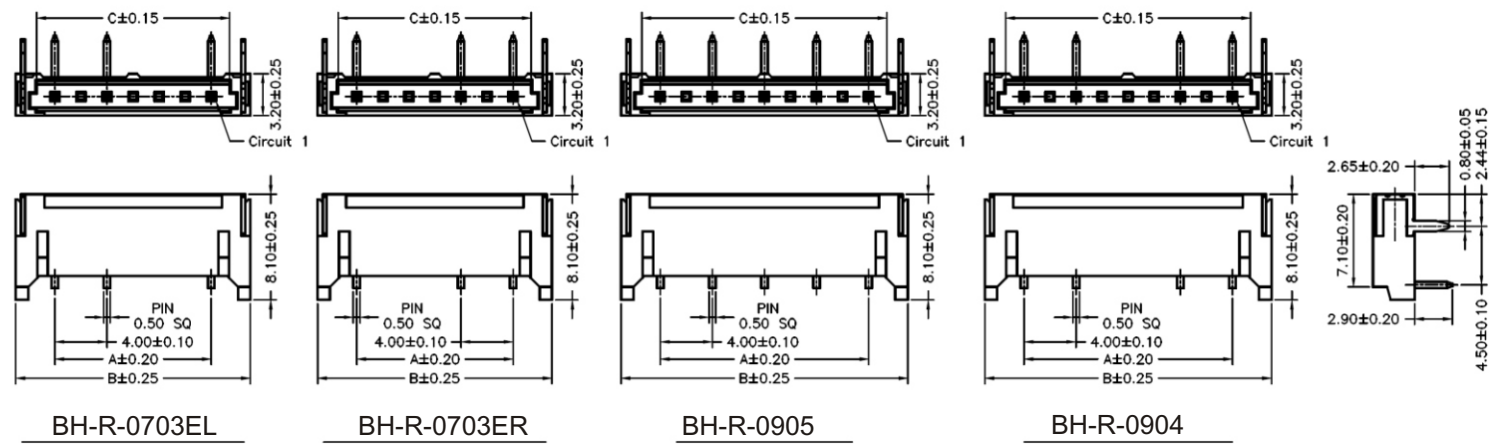


SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1800V AC/minute
 Pin Material: Brass/Tin-plated
 Solder Tabs: Brass/Tin-plated
 Material: Nylon 6T,UL94V-0
 Color: Natural(Beige)

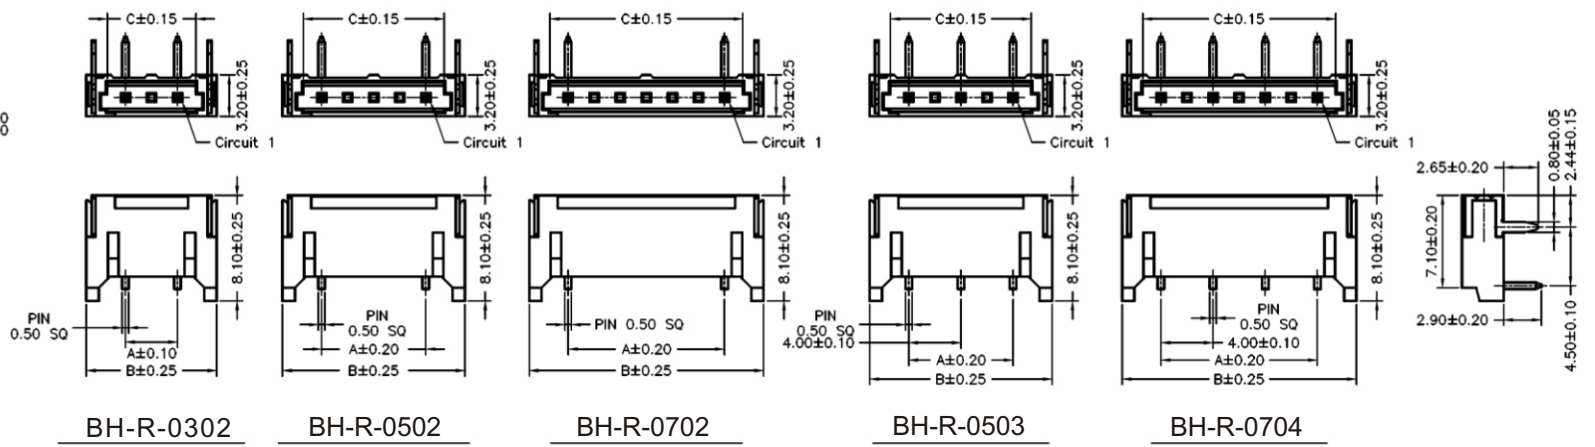

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
BH-R-0302	4.00	10.00	6.80
BH-R-0502	8.00	14.00	10.80
BH-R-0702	12.00	18.00	14.80
BH-R-0503	8.00	14.00	10.80
BH-R-0704	12.00	18.00	14.80
BH-R-0703EL	12.00	18.00	14.80
BH-R-0703ER	12.00	18.00	14.80
BH-R-0905	16.00	22.00	18.80
	16.00	22.00	18.80


RoHS Compliant

TOLERANCES ARE




DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION



煜倫股份有限公司

www.morethanall.com

SIZE A4 PPROJECTION

DESCRIPTION: