


- NOTE :**
- \* Material : Nylon UL 94V-0
  - \* Electrical rating : UL 600V 1A, AC/DC  
CSA 1400V 1A , AC/DC
  - \* Standard color : White
  - \* Temperature range : -25°C to +85°C  
(including temperature rise in applying electrical current)
  - \* Contact resistance :  
Initial value/ 10m Ω max.  
After environmental testing/ 20m Ω max.
  - \* Insulation resistance : 1000M Ω min.
  - \* Withstanding voltage : 3800V AC/ minute
  - \* Applicable wire : AWG #28 to #22  
Insulation O.D/0.9 to 1.8mm (.035" to .071")

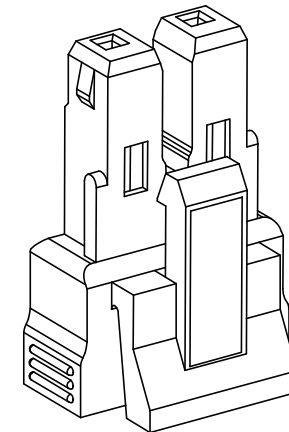

BHS-SL-02-LF  
LEADFREE  
RoHS Compliant

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. BHS-SL-02

DWG NO. BHS-SL-02

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION:

FILE NO.

DRAWING BY

.X ± 0.2

.XX ±

.XXX ±

AWG

AREA

REVISIONS

HK


DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



1	2	3	4	5	6	7	8	9	0			
J												
I												
H												
G												
F												
E												
D												
C												
B												
A												