
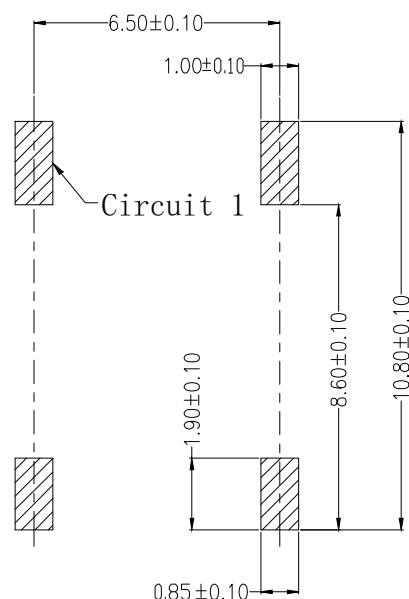
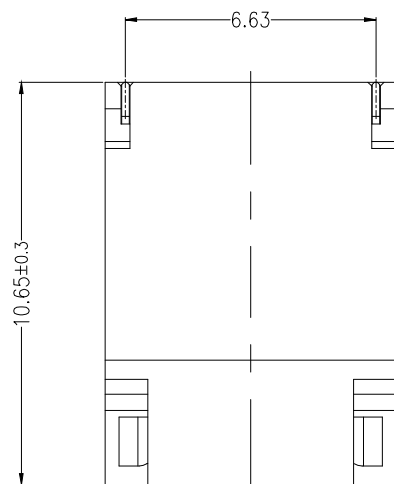
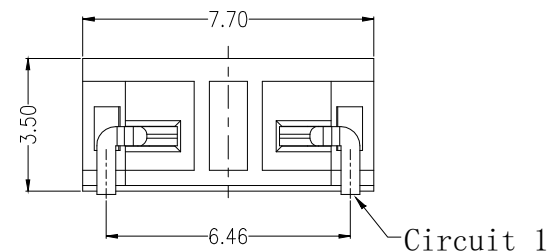
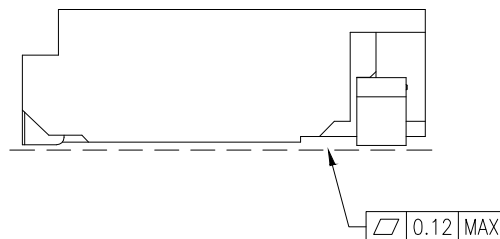


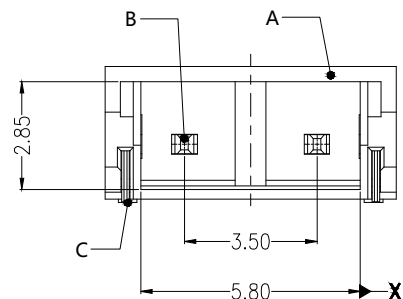

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

主要技术参数 Main Specifications

线 数 (Poles): 02
 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
 额定电压 (Rated voltage): 1400V AC DC
 额定电流 (Rated current): 1.0A AC DC
 耐 电 压 (Withstand Voltage): 3800V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$

C	SOLDER TAB		2 PCS	PhosphorBronze	Sn-plated
B	CONTACT		2 PCS	PhosphorBronze	Sn-plated
A	PEDESTAL		1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.25
 .XXX ± 0.10
 ANG ±

PPOJECTION



ORDER INFORMATION

BHS-W-02-LF
 SERIES | T LEADFREE
 02 WAY
 90°SMT

DESCRIPTION: